


STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING						FORM 3 AMENDED REPORT <input type="checkbox"/>				
<b>APPLICATION FOR PERMIT TO DRILL</b>						<b>1. WELL NAME and NUMBER</b> GMBU A-4-9-17				
<b>2. TYPE OF WORK</b> DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						<b>3. FIELD OR WILDCAT</b> MONUMENT BUTTE				
<b>4. TYPE OF WELL</b> Oil Well Coalbed Methane Well: NO						<b>5. UNIT or COMMUNITIZATION AGREEMENT NAME</b> GMBU (GRRV)				
<b>6. NAME OF OPERATOR</b> NEWFIELD PRODUCTION COMPANY						<b>7. OPERATOR PHONE</b> 435 646-4825				
<b>8. ADDRESS OF OPERATOR</b> Rt 3 Box 3630 , Myton, UT, 84052						<b>9. OPERATOR E-MAIL</b> mcrozier@newfield.com				
<b>10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)</b> UTU-79017			<b>11. MINERAL OWNERSHIP</b> FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			<b>12. SURFACE OWNERSHIP</b> FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>				
<b>13. NAME OF SURFACE OWNER (if box 12 = 'fee')</b>						<b>14. SURFACE OWNER PHONE (if box 12 = 'fee')</b>				
<b>15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')</b>						<b>16. SURFACE OWNER E-MAIL (if box 12 = 'fee')</b>				
<b>17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')</b>			<b>18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS</b> YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			<b>19. SLANT</b> VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>				
<b>20. LOCATION OF WELL</b>	<b>FOOTAGES</b>		<b>QTR-QTR</b>	<b>SECTION</b>	<b>TOWNSHIP</b>	<b>RANGE</b>	<b>MERIDIAN</b>			
<b>LOCATION AT SURFACE</b>	459 FSL 404 FWL		SWSW	34	8.0 S	17.0 E	S			
<b>Top of Uppermost Producing Zone</b>	113 FSL 99 FWL		SWSW	34	8.0 S	17.0 E	S			
<b>At Total Depth</b>	30 FNL 40 FEL		NENE	4	9.0 S	17.0 E	S			
<b>21. COUNTY</b> DUCESNE			<b>22. DISTANCE TO NEAREST LEASE LINE (Feet)</b> 30			<b>23. NUMBER OF ACRES IN DRILLING UNIT</b> 20				
			<b>25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed)</b> 1419			<b>26. PROPOSED DEPTH</b> MD: 6206 TVD: 6206				
<b>27. ELEVATION - GROUND LEVEL</b> 5098			<b>28. BOND NUMBER</b> WYB000493			<b>29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE</b> 437478				
<b>Hole, Casing, and Cement Information</b>										
<b>String</b>	<b>Hole Size</b>	<b>Casing Size</b>	<b>Length</b>	<b>Weight</b>	<b>Grade &amp; Thread</b>	<b>Max Mud Wt.</b>	<b>Cement</b>	<b>Sacks</b>	<b>Yield</b>	<b>Weight</b>
<b>Surf</b>	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8
<b>Prod</b>	7.875	5.5	0 - 6206	15.5	J-55 LT&C	8.3	Premium Lite High Strength	291	3.26	11.0
							50/50 Poz	363	1.24	14.3
<b>ATTACHMENTS</b>										
<b>VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES</b>										
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
<b>NAME</b> Mandie Crozier				<b>TITLE</b> Regulatory Tech				<b>PHONE</b> 435 646-4825		
<b>SIGNATURE</b>				<b>DATE</b> 05/31/2011				<b>EMAIL</b> mcrozier@newfield.com		
<b>API NUMBER ASSIGNED</b> 43013508000000				<b>APPROVAL</b>  Permit Manager						

NEWFIELD PRODUCTION COMPANY  
GMBU A-4-9-17  
AT SURFACE: SW/SW SECTION 34, T8S, R17E  
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1435'
Green River	1435'
Wasatch	6120'
<b>Proposed TD</b>	<b>6206'</b>

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil)      1435' – 6120'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO <sub>3</sub> ) (mg/l)
Dissolved Bicarbonate (NaHCO <sub>3</sub> ) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO <sub>4</sub> ) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: GMBU A-4-9-17**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,206'	15.5	J-55	LTC	4,810 2.44	4,040 2.05	217,000 2.26

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg  
 Pore pressure at surface casing shoe = 8.33 ppg  
 Pore pressure at prod casing shoe = 8.33 ppg  
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: GMBU A-4-9-17**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft <sup>3</sup> /sk)
			ft <sup>3</sup>			
Surface casing	300'	Class G w/ 2% CaCl	138 161	30%	15.8	1.17
Prod casing Lead	4,206'	Prem Lite II w/ 10% gel + 3% KCl	291 947	30%	11.0	3.26
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363 451	30%	14.3	1.24

\*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to  $\pm 350$  feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about  $\pm 350$  feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.


10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2011, and take approximately seven (7) days from spud to rig release.



BASIS OF ELEV; Elevations are based on  
an N.G.S. OPUS Correction. LOCATION:  
LAT. 40°04'09.56" LONG. 110°00'43.28"  
(Tristate Aluminum Cap) Elev. 5281.57'

TARGET BOTTOM HOLE, A-4-9-17,  
LOCATED AS SHOWN IN THE NE 1/4 NE  
1/4 (LOT 1) OF SECTION 4, T9S, R17E,  
S.L.B.&M. DUCHESNE COUNTY, UTAH.

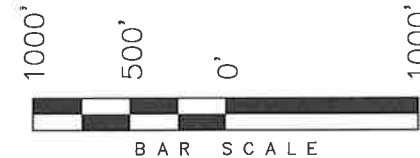

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Bottom of Hole footages are 166' FNL & 163' FEL.
4. The Center of Pattern footages are 30' FNL & 40' FEL.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS  
PREPARED FROM FIELD NOTES OF ACADEMIC SURVEYS  
MADE BY ME OR UNDER MY SUPERVISION AND THAT  
THE SAME ARE TRUE AND CORRECT TO THE BEST  
OF MY KNOWLEDGE AND BELIEF.


STACY W. STEWART  
REGISTERED LAND SURVEYOR  
REGISTRATION No. 100737  
STATE OF UTAH 02-15-11 UTAH

180 NORTH VERNAL AVE. — VERNAL, UTAH 84078  
(435) 781-2501

DATE SURVEYED: 01-23-11	SURVEYED BY: C.M.
DATE DRAWN: 02-09-11	DRAWN BY: M.W.
REVISED:	SCALE: 1" = 1000'



## Access Road Map

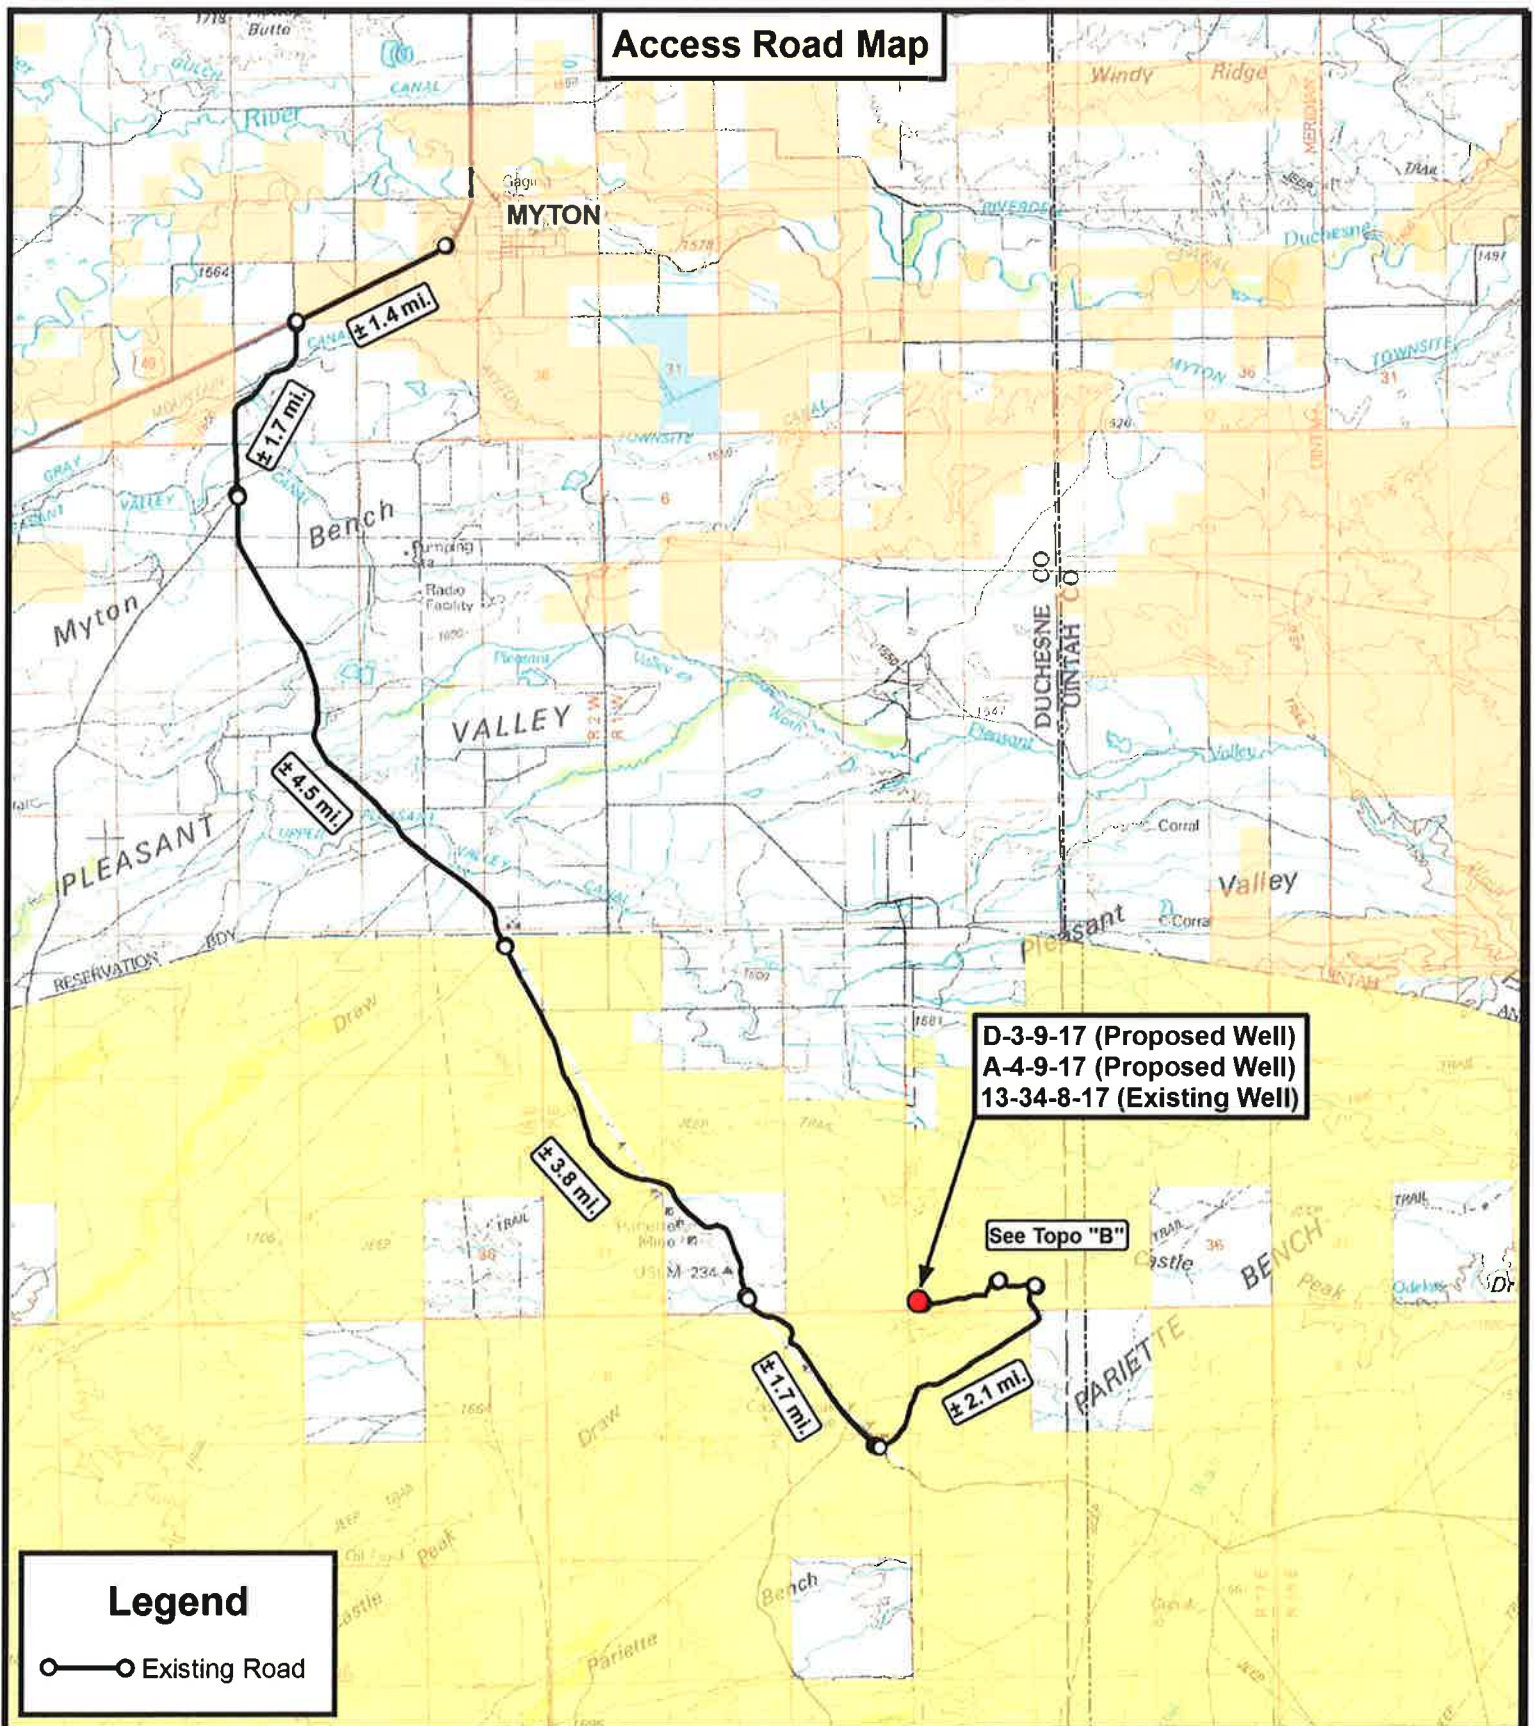

D-3-9-17 (Proposed Well)  
A-4-9-17 (Proposed Well)  
13-34-8-17 (Existing Well)

See Topo "B"

$\pm 2.1$  ml.

### Legend



**Tri State**  
**Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518

**NEWFIELD EXPLORATION COMPANY**

**D-3-9-17 (Proposed Well)**  
**A-4-9-17 (Proposed Well)**  
**13-34-8-17 (Existing Well)**

**SEC. 34, T8S, R17E, S.L.B.&M. Duchesne County, UT.**

DRAWN BY: J.A.S.

DATE: 02-23-2011

SCALE: 1:100,000


## TOPOGRAPHIC MAP

SHEET

A

RECEIVED: Jun. 07, 2011



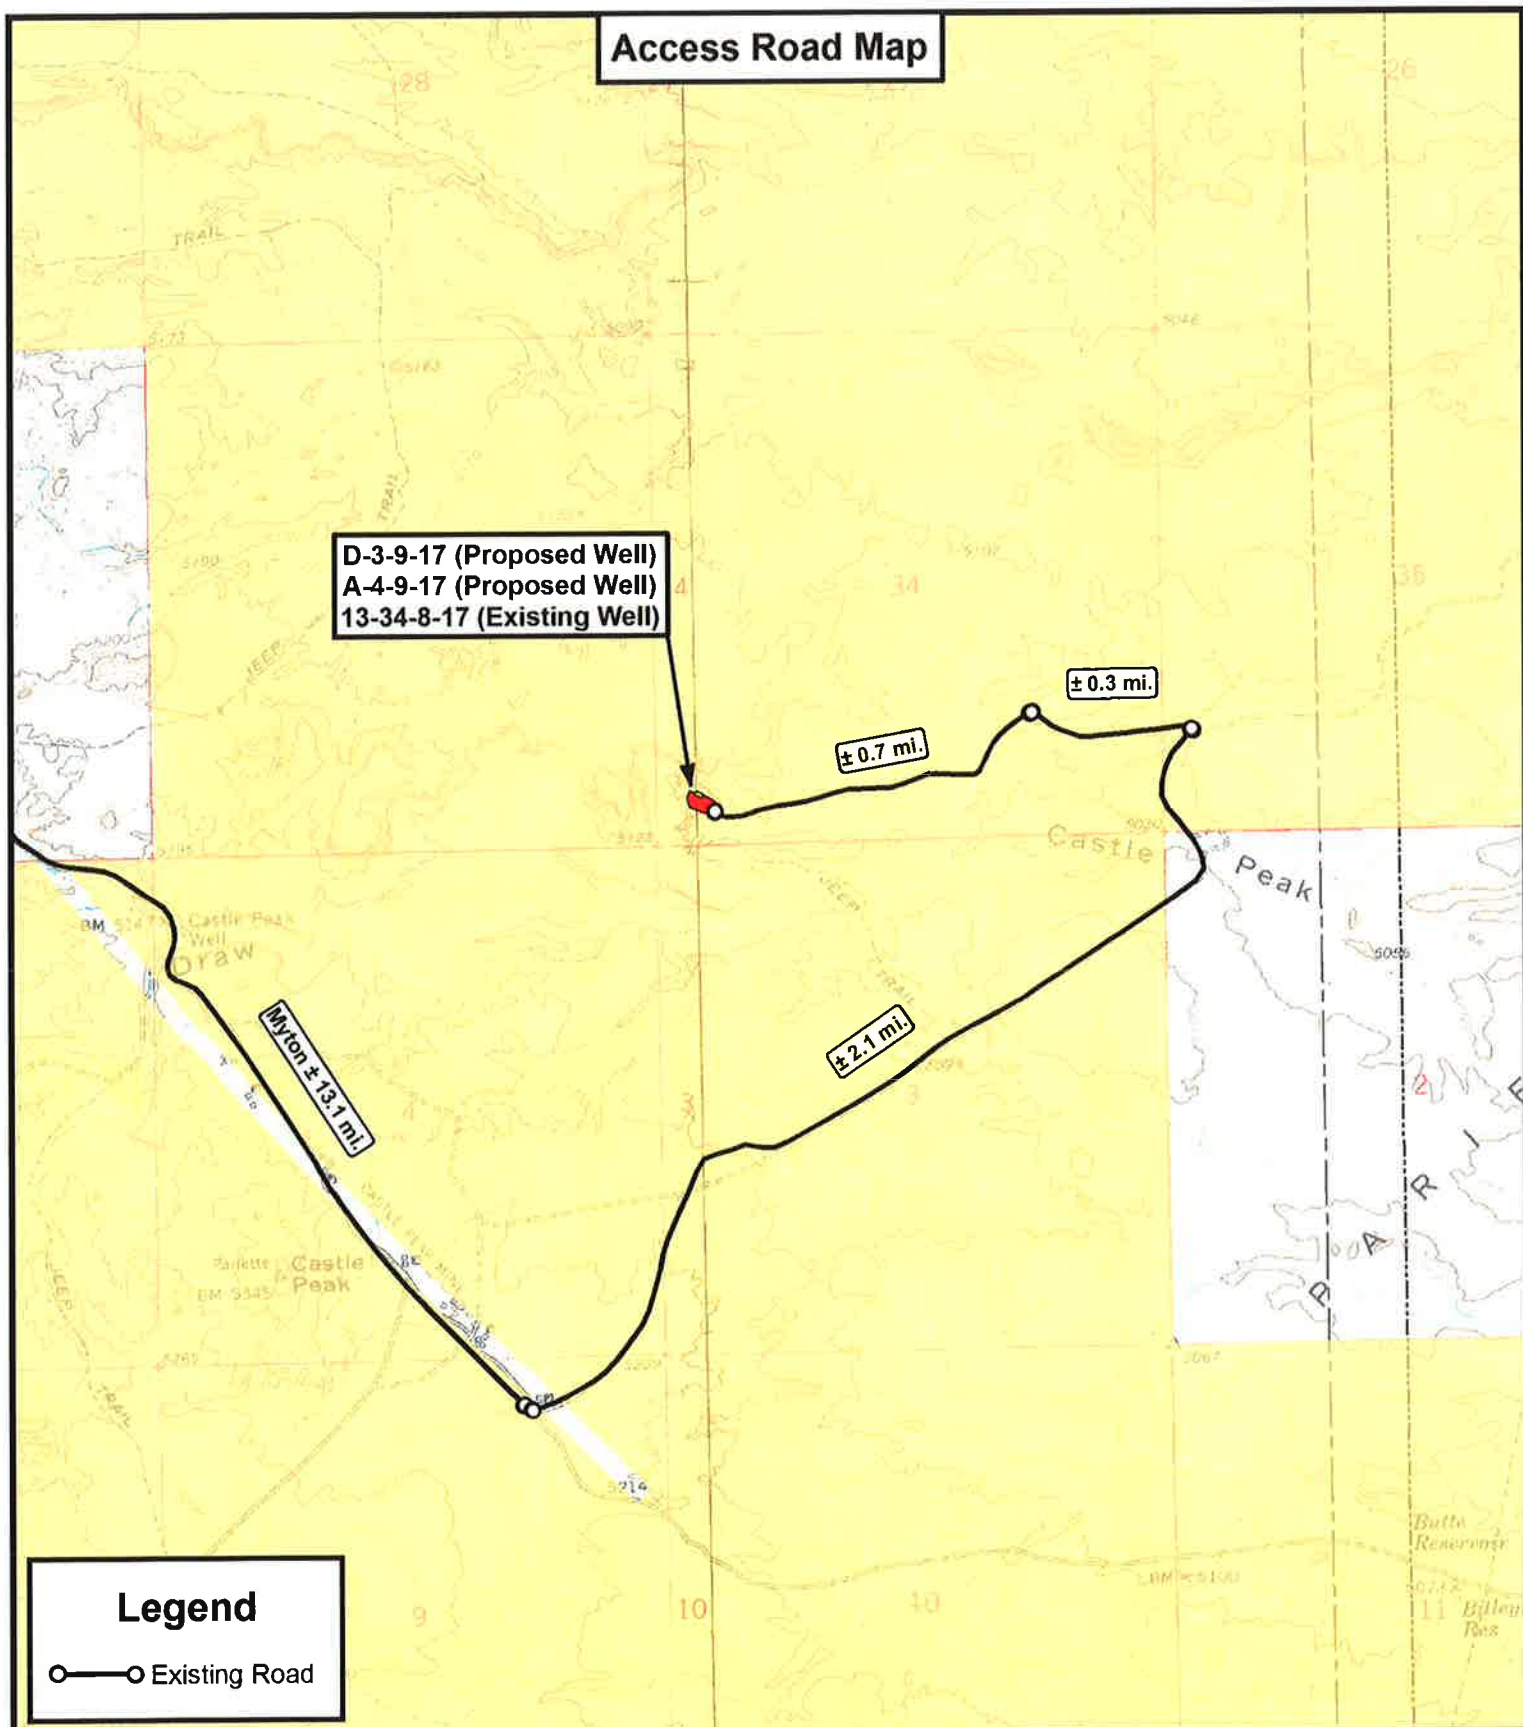

**Tri State**  
**Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518



### NEWFIELD EXPLORATION COMPANY

D-3-9-17 (Proposed Well)  
 A-4-9-17 (Proposed Well)  
 13-34-8-17 (Existing Well)

SEC. 34, T8S, R17E, S.L.B.&M. Duchesne County, UT.

DRAWN BY: J.A.S.  
 DATE: 02-23-2011  
 SCALE: 1" = 2,000'

**TOPOGRAPHIC MAP**

SHEET  
**B**

RECEIVED: Jun. 07, 2011

# Proposed Pipeline Map

D-3-9-17 (Proposed Well)  
A-4-9-17 (Proposed Well)  
13-34-8-17 (Existing Well)

Tie in at Existing  
Flowline

± 1,842'

## Legend

- Proposed Flowline
- Existing Road

**Tri State**  
**Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



## NEWFIELD EXPLORATION COMPANY

D-3-9-17 (Proposed Well)  
A-4-9-17 (Proposed Well)  
13-34-8-17 (Existing Well)  
SEC. 34, T8S, R17E, S.L.B.&M. Duchesne County, UT.


DRAWN BY: J.A.S.  
DATE: 02-23-2011  
SCALE: 1" = 2,000'

TOPOGRAPHIC MAP

SHEET  
**C**

RECEIVED: Jun. 07, 2011




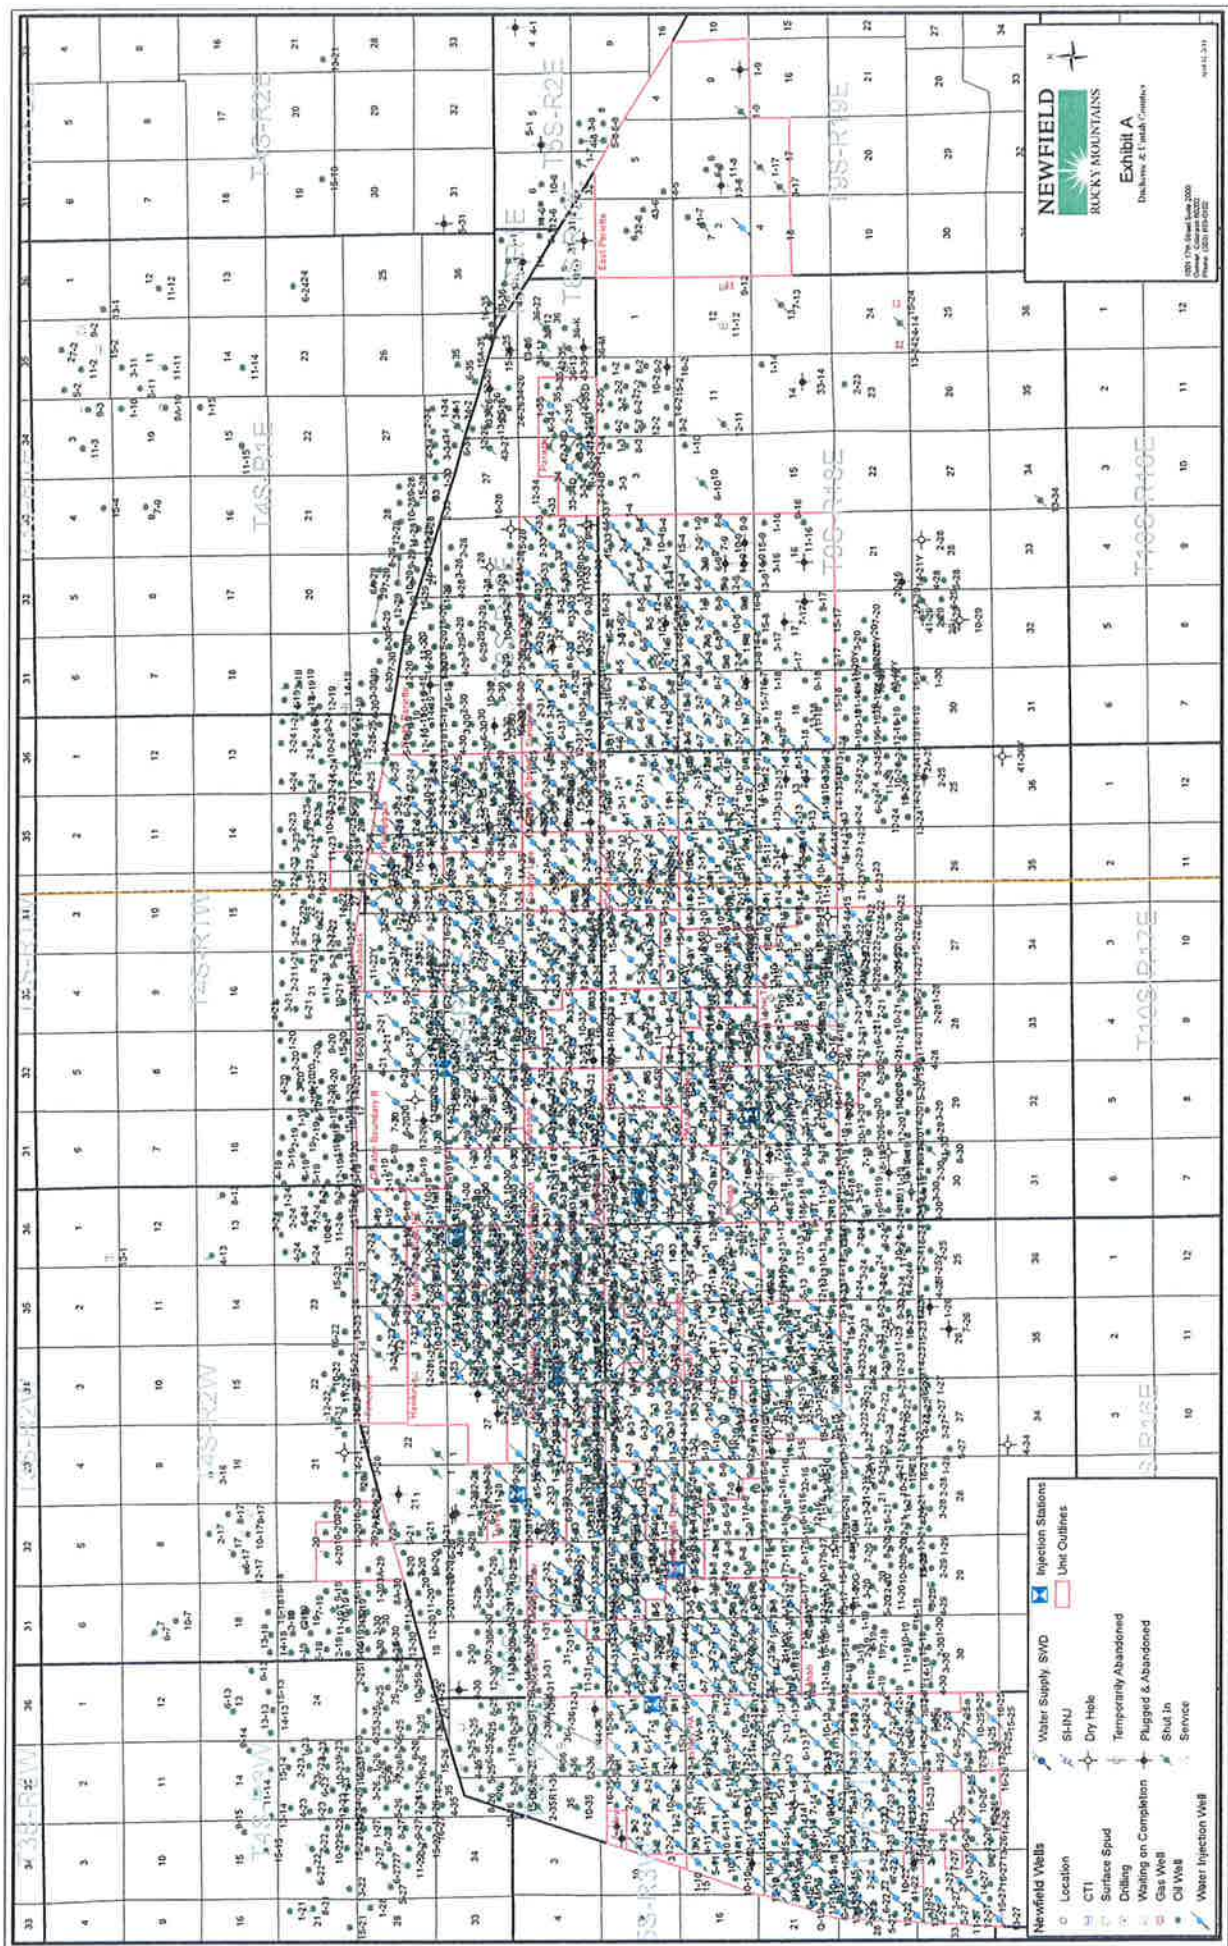



**Exhibit "B" Map**

**D-3-9-17 (Proposed Well)**  
**A-4-9-17 (Proposed Well)**  
**13-34-8-17 (Existing Well)**

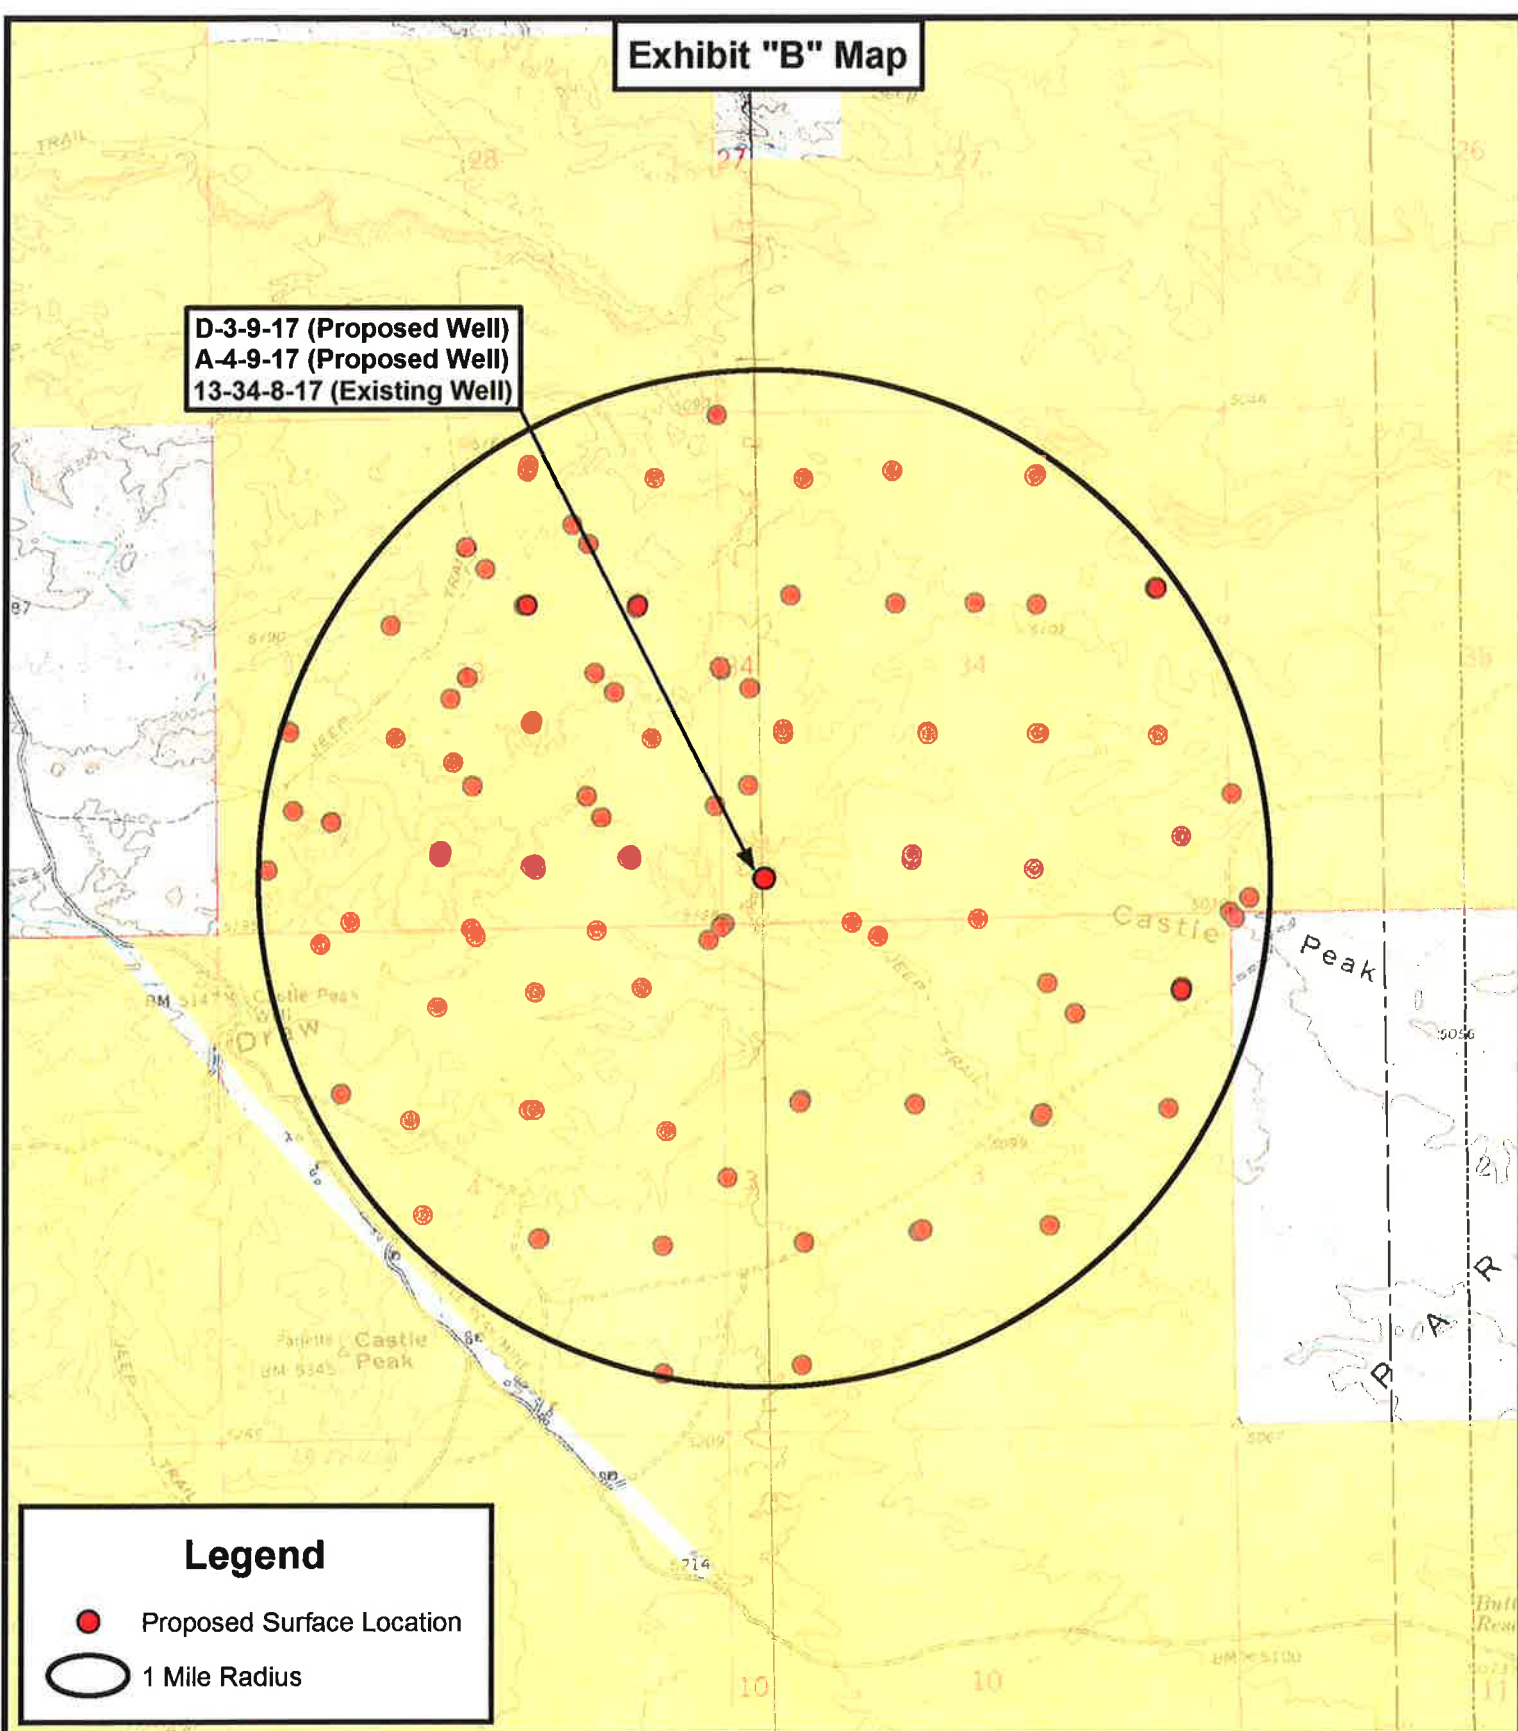

**Legend**

- Proposed Surface Location
- 1 Mile Radius

**Tri State**  
**Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**

**D-3-9-17 (Proposed Well)**  
**A-4-9-17 (Proposed Well)**  
**13-34-8-17 (Existing Well)**  
**SEC. 34, T8S, R17E, S.L.B.&M. Duchesne County, UT.**

**TOPOGRAPHIC MAP**

**SHEET**  
**D**

**DRAWN BY:** J.A.S.  
**DATE:** 02-23-2011  
**SCALE:** 1" = 2,000'

**RECEIVED:** Jun. 07, 2011



## **NEWFIELD EXPLORATION**

**USGS Myton SW (UT)**

**SECTION 4 T9S R17E**

**A-4-9-17**

**Wellbore #1**

**Plan: Design #1**

## **Standard Planning Report**

**02 February, 2011**







## PayZone Directional Services, LLC.

## Planning Report



<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well A-4-9-17
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	A-4-9-17 @ 5110.0ft (Newfield Rig)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	A-4-9-17 @ 5110.0ft (Newfield Rig)
<b>Site:</b>	SECTION 4 T9S R17E	<b>North Reference:</b>	True
<b>Well:</b>	A-4-9-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

<b>Project</b>	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Utah Central Zone		

<b>Site</b>	SECTION 4 T9S R17E				
<b>Site Position:</b>		<b>Northing:</b>	7,194,100.00 ft	<b>Latitude:</b>	40° 3' 36.542 N
<b>From:</b>	Lat/Long	<b>Easting:</b>	2,057,000.00 ft	<b>Longitude:</b>	110° 0' 41.593 W
<b>Position Uncertainty:</b>	0.0 ft	<b>Slot Radius:</b>	"	<b>Grid Convergence:</b>	0.95 °

<b>Well</b>	A-4-9-17, SHL LAT: 40 04 06.40 LONG: -110 00 02.44					
<b>Well Position</b>	<b>+N/-S</b>	3,020.9 ft	<b>Northing:</b>	7,197,171.50 ft	<b>Latitude:</b>	40° 4' 6.400 N
	<b>+E/-W</b>	3,044.0 ft	<b>Easting:</b>	2,059,992.97 ft	<b>Longitude:</b>	110° 0' 2.440 W
<b>Position Uncertainty</b>		0.0 ft	<b>Wellhead Elevation:</b>	5,110.0 ft	<b>Ground Level:</b>	5,098.0 ft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	2011/02/02	11.34	65.84	52,331

<b>Design</b>	Design #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>
	5,000.0	0.0	0.0	221.33

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,211.3	9.17	221.33	1,208.7	-36.7	-32.2	1.50	1.50	0.00	221.33	
5,051.7	9.17	221.33	5,000.0	-496.2	-436.4	0.00	0.00	0.00	0.00	A-4-9-17 TGT
6,206.4	9.17	221.33	6,140.0	-634.4	-557.9	0.00	0.00	0.00	0.00	



## PayZone Directional Services, LLC.

## Planning Report



**Database:** EDM 2003.21 Single User Db  
**Company:** NEWFIELD EXPLORATION  
**Project:** USGS Myton SW (UT)  
**Site:** SECTION 4 T9S R17E  
**Well:** A-4-9-17  
**Wellbore:** Wellbore #1  
**Design:** Design #1

**Local Co-ordinate Reference:** Well A-4-9-17  
**TVD Reference:** A-4-9-17 @ 5110.0ft (Newfield Rig)  
**MD Reference:** A-4-9-17 @ 5110.0ft (Newfield Rig)  
**North Reference:** True  
**Survey Calculation Method:** Minimum Curvature

## Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	221.33	700.0	-1.0	-0.9	1.3	1.50	1.50	0.00
800.0	3.00	221.33	799.9	-3.9	-3.5	5.2	1.50	1.50	0.00
900.0	4.50	221.33	899.7	-8.8	-7.8	11.8	1.50	1.50	0.00
1,000.0	6.00	221.33	999.3	-15.7	-13.8	20.9	1.50	1.50	0.00
1,100.0	7.50	221.33	1,098.6	-24.5	-21.6	32.7	1.50	1.50	0.00
1,200.0	9.00	221.33	1,197.5	-35.3	-31.1	47.0	1.50	1.50	0.00
1,211.3	9.17	221.33	1,208.7	-36.7	-32.2	48.8	1.50	1.50	0.00
1,300.0	9.17	221.33	1,296.3	-47.3	-41.6	62.9	0.00	0.00	0.00
1,400.0	9.17	221.33	1,395.0	-59.2	-52.1	78.9	0.00	0.00	0.00
1,500.0	9.17	221.33	1,493.7	-71.2	-62.6	94.8	0.00	0.00	0.00
1,600.0	9.17	221.33	1,592.4	-83.2	-73.1	110.8	0.00	0.00	0.00
1,700.0	9.17	221.33	1,691.1	-95.1	-83.7	126.7	0.00	0.00	0.00
1,800.0	9.17	221.33	1,789.9	-107.1	-94.2	142.6	0.00	0.00	0.00
1,900.0	9.17	221.33	1,888.6	-119.1	-104.7	158.6	0.00	0.00	0.00
2,000.0	9.17	221.33	1,987.3	-131.0	-115.2	174.5	0.00	0.00	0.00
2,100.0	9.17	221.33	2,086.0	-143.0	-125.8	190.4	0.00	0.00	0.00
2,200.0	9.17	221.33	2,184.8	-155.0	-136.3	206.4	0.00	0.00	0.00
2,300.0	9.17	221.33	2,283.5	-166.9	-146.8	222.3	0.00	0.00	0.00
2,400.0	9.17	221.33	2,382.2	-178.9	-157.3	238.2	0.00	0.00	0.00
2,500.0	9.17	221.33	2,480.9	-190.9	-167.9	254.2	0.00	0.00	0.00
2,600.0	9.17	221.33	2,579.6	-202.8	-178.4	270.1	0.00	0.00	0.00
2,700.0	9.17	221.33	2,678.4	-214.8	-188.9	286.0	0.00	0.00	0.00
2,800.0	9.17	221.33	2,777.1	-226.8	-199.4	302.0	0.00	0.00	0.00
2,900.0	9.17	221.33	2,875.8	-238.7	-210.0	317.9	0.00	0.00	0.00
3,000.0	9.17	221.33	2,974.5	-250.7	-220.5	333.9	0.00	0.00	0.00
3,100.0	9.17	221.33	3,073.3	-262.7	-231.0	349.8	0.00	0.00	0.00
3,200.0	9.17	221.33	3,172.0	-274.6	-241.5	365.7	0.00	0.00	0.00
3,300.0	9.17	221.33	3,270.7	-286.6	-252.0	381.7	0.00	0.00	0.00
3,400.0	9.17	221.33	3,369.4	-298.6	-262.6	397.6	0.00	0.00	0.00
3,500.0	9.17	221.33	3,468.1	-310.5	-273.1	413.5	0.00	0.00	0.00
3,600.0	9.17	221.33	3,566.9	-322.5	-283.6	429.5	0.00	0.00	0.00
3,700.0	9.17	221.33	3,665.6	-334.5	-294.1	445.4	0.00	0.00	0.00
3,800.0	9.17	221.33	3,764.3	-346.4	-304.7	461.3	0.00	0.00	0.00
3,900.0	9.17	221.33	3,863.0	-358.4	-315.2	477.3	0.00	0.00	0.00
4,000.0	9.17	221.33	3,961.8	-370.4	-325.7	493.2	0.00	0.00	0.00
4,100.0	9.17	221.33	4,060.5	-382.3	-336.2	509.2	0.00	0.00	0.00
4,200.0	9.17	221.33	4,159.2	-394.3	-346.8	525.1	0.00	0.00	0.00
4,300.0	9.17	221.33	4,257.9	-406.3	-357.3	541.0	0.00	0.00	0.00
4,400.0	9.17	221.33	4,356.6	-418.2	-367.8	557.0	0.00	0.00	0.00
4,500.0	9.17	221.33	4,455.4	-430.2	-378.3	572.9	0.00	0.00	0.00
4,600.0	9.17	221.33	4,554.1	-442.2	-388.9	588.8	0.00	0.00	0.00
4,700.0	9.17	221.33	4,652.8	-454.1	-399.4	604.8	0.00	0.00	0.00
4,800.0	9.17	221.33	4,751.5	-466.1	-409.9	620.7	0.00	0.00	0.00
4,900.0	9.17	221.33	4,850.3	-478.1	-420.4	636.6	0.00	0.00	0.00
5,000.0	9.17	221.33	4,949.0	-490.0	-431.0	652.6	0.00	0.00	0.00
5,051.7	9.17	221.33	5,000.0	-496.2	-436.4	660.8	0.00	0.00	0.00

A-4-9-17 TGT



## PayZone Directional Services, LLC.

## Planning Report



**Database:** EDM 2003.21 Single User Db  
**Company:** NEWFIELD EXPLORATION  
**Project:** USGS Myton SW (UT)  
**Site:** SECTION 4 T9S R17E  
**Well:** A-4-9-17  
**Wellbore:** Wellbore #1  
**Design:** Design #1

**Local Co-ordinate Reference:** Well A-4-9-17  
**TVD Reference:** A-4-9-17 @ 5110.0ft (Newfield Rig)  
**MD Reference:** A-4-9-17 @ 5110.0ft (Newfield Rig)  
**North Reference:** True  
**Survey Calculation Method:** Minimum Curvature

## Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Bulld Rate (°/100ft)	Turn Rate (°/100ft)
5,100.0	9.17	221.33	5,047.7	-502.0	-441.5	668.5	0.00	0.00	0.00
5,200.0	9.17	221.33	5,146.4	-514.0	-452.0	684.4	0.00	0.00	0.00
5,300.0	9.17	221.33	5,245.1	-525.9	-462.5	700.4	0.00	0.00	0.00
5,400.0	9.17	221.33	5,343.9	-537.9	-473.1	716.3	0.00	0.00	0.00
5,500.0	9.17	221.33	5,442.6	-549.9	-483.6	732.3	0.00	0.00	0.00
5,600.0	9.17	221.33	5,541.3	-561.8	-494.1	748.2	0.00	0.00	0.00
5,700.0	9.17	221.33	5,640.0	-573.8	-504.6	764.1	0.00	0.00	0.00
5,800.0	9.17	221.33	5,738.8	-585.8	-515.1	780.1	0.00	0.00	0.00
5,900.0	9.17	221.33	5,837.5	-597.7	-525.7	796.0	0.00	0.00	0.00
6,000.0	9.17	221.33	5,936.2	-609.7	-536.2	811.9	0.00	0.00	0.00
6,100.0	9.17	221.33	6,034.9	-621.7	-546.7	827.9	0.00	0.00	0.00
6,206.4	9.17	221.33	6,140.0	-634.4	-557.9	844.8	0.00	0.00	0.00

## Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
A-4-9-17 TGT - plan hits target - Circle (radius 75.0)	0.00	0.00	5,000.0	-496.2	-436.4	7,196,668.04	2,059,564.95	40° 4' 1.496 N	110° 0' 8.054 W





Project: USGS Myton SW (UT)  
 Site: SECTION 4 T9S R17E  
 Well: A-4-9-17  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.34°

Magnetic Field  
 Strength: 52331.2snT  
 Dip Angle: 65.84°  
 Date: 2011/02/02  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

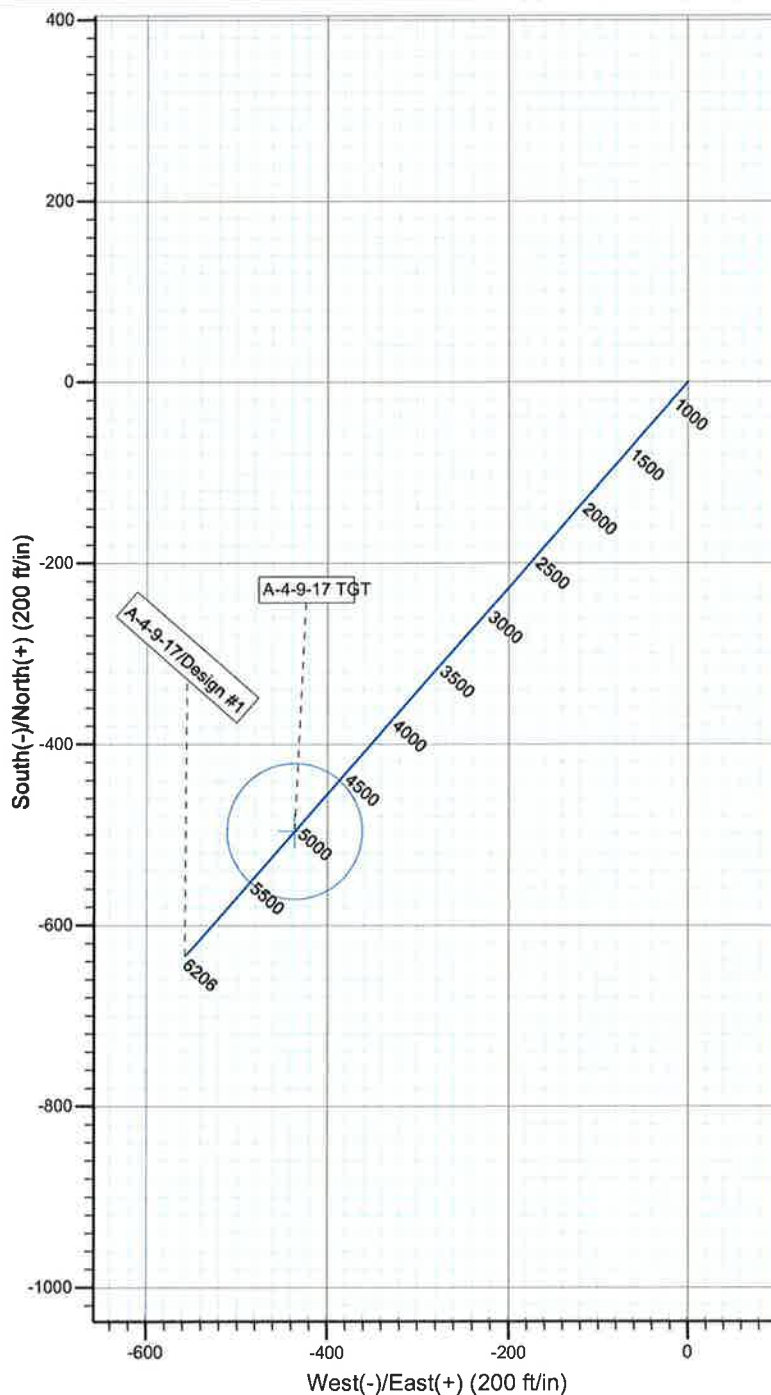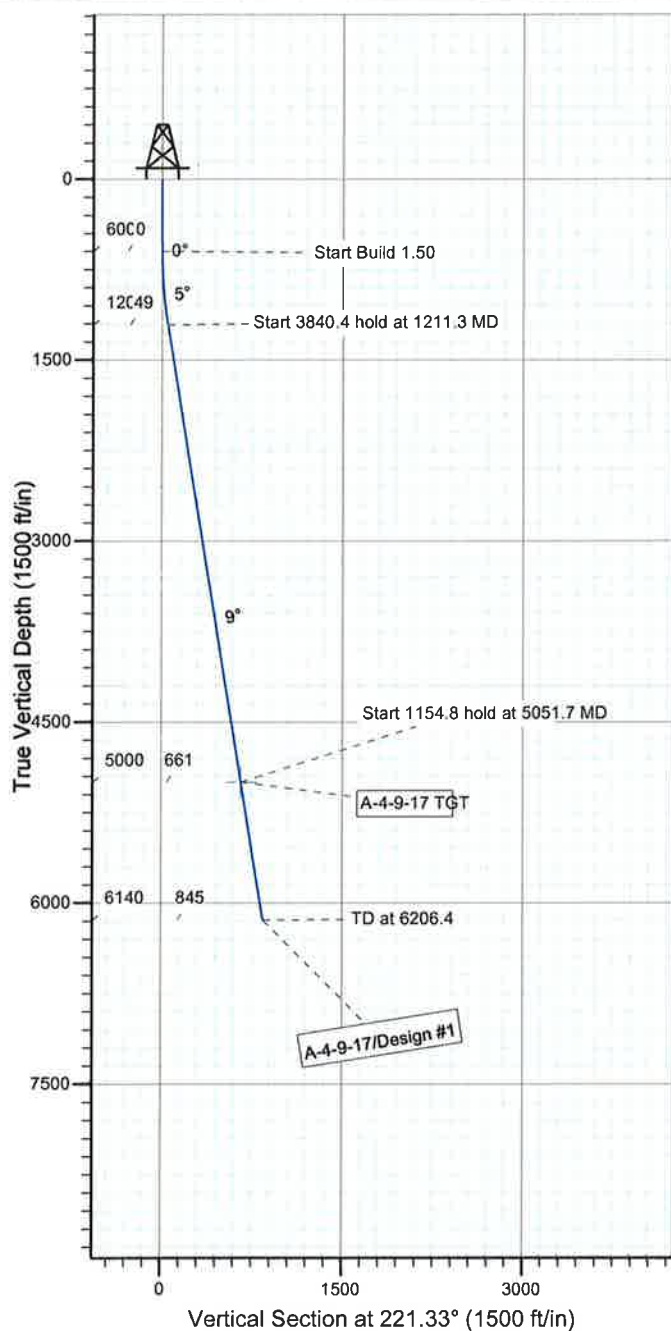

#### WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
A-4-9-17 TGT	5000.0	-496.2	-436.4	Circle (Radius: 75.0)

#### SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1211.3	9.17	221.33	1208.7	-36.7	-32.2	1.50	221.33	48.8	
4	5051.7	9.17	221.33	5000.0	-496.2	-436.4	0.00	0.00	660.8	A-4-9-17 TGT
5	6206.4	9.17	221.33	6140.0	-634.4	-557.9	0.00	0.00	844.8	



**NEWFIELD PRODUCTION COMPANY  
GMBU A-4-9-17  
AT SURFACE: SW/SW SECTION 34, T8S, R17E  
DUCHESNE COUNTY, UTAH**

**ONSHORE ORDER NO. 1**

**MULTI-POINT SURFACE USE & OPERATIONS PLAN**

**1. EXISTING ROADS**

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU A-4-9-17 located in the SW 1/4 SW 1/4 Section 34, T8S, R17E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles  $\pm$  to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction - 11.7 miles to it's junction with an existing dirt road to the northeast; proceed in a northeasterly direction - 2.1 miles to it's junction with an existing road to the west; proceed in a westerly direction - 0.3 miles to it's junction with an existing road to the southwest; proceed southwesterly 0.7 miles to it's junction the beginning of the access road to the existing 13-34-8-17 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

**2. PLANNED ACCESS ROAD**

There is no proposed access road for this location. The proposed well will be drilled directionaly off of the existing 13-34-8-17 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

**3. LOCATION OF EXISTING WELLS**

Refer to Exhibit "B".

**4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.



It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District  
Water Right : 43-10136

Maurice Harvey Pond  
Water Right: 47-1358

Neil Moon Pond  
Water Right: 43-11787

Newfield Collector Well  
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

**Fencing Requirements**

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. State of Utah Antiquities Project Permit #U-04-MQ-0436b,p 6/2/04, prepared by

Montgomery Archaeological Consultants. Paleontological Resource Survey prepared by, Wade E. Miller, 7/9/04. See attached report cover pages, Exhibit "D".

#### **Surface Flow Line**

Newfield requests 1,842' of surface flow line be granted. The Surface Flow Line will consist of up to a 14" bundled pipe consisting of 2-2" poly glycol lines and 1-3" production line. For all new wells, Newfield. **Refer to Topographic Map "C"** for the proposed location of the proposed flow line. Flow lines will be tan and will be constructed using the following procedures:

Clearing and Grading: No clearing or grading of the ROW will be required. The centerline of the proposed route will be staked prior to installation. Flow lines shall be placed as close to existing roads as possible without interfering with normal road travel or road maintenance activities. Due to the proximity of existing facilities, no temporary use or construction/storage areas are anticipated. If necessary, temporary use or construction/storage areas will be identified on a topographic map included in the approved permit.

Installation: The proposed flow lines will be installed 4-6" above the ground. For portions along existing two-track and primary access roads, lengths of pipe will be strung out in the borrow ditch, welded together, and rolled or dragged into place with heavy equipment. For pipelines that are installed cross-country (not along existing or proposed roads), travel along the lines will be infrequent and for maintenance needs only. No installation activities will be performed during periods when the soil is too wet to adequately support installation equipment. If such equipment creates ruts in excess of three (3) inches deep, the soil will be deemed too wet to adequately support the equipment.

Termination and Final Reclamation: After abandonment of the associated production facilities, the flow lines will be cut and removed, and any incidental surface disturbance reclaimed. Reclamation procedures will follow those outlined in the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

#### **Water Disposal**

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

#### **Additional Surface Stipulations**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

#### **Details of the On-Site Inspection**

The proposed GMBU A-4-9-17 was on-sited on 4/26/11. The following were present; Tim Eaton (Newfield Production) and Janna Simonsen (Bureau of Land Management).

#### **Hazardous Material Declaration**

Newfield Production Company guarantees that during the drilling and completion of the GMBU A-4-9-17, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU A-4-9-17, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Tim Eaton  
Address: Newfield Production Company  
Route 3, Box 3630  
Myton, UT 84052  
Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #A-4-9-17, Section 34, Township 8S, Range 17E: Lease UTU-79017 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

5/20/11  
Date

\_\_\_\_\_  
Mandie Crozier  
Regulatory Specialist  
Newfield Production Company

## 2-M SYSTEM

Blowout Prevention Equipment Systems

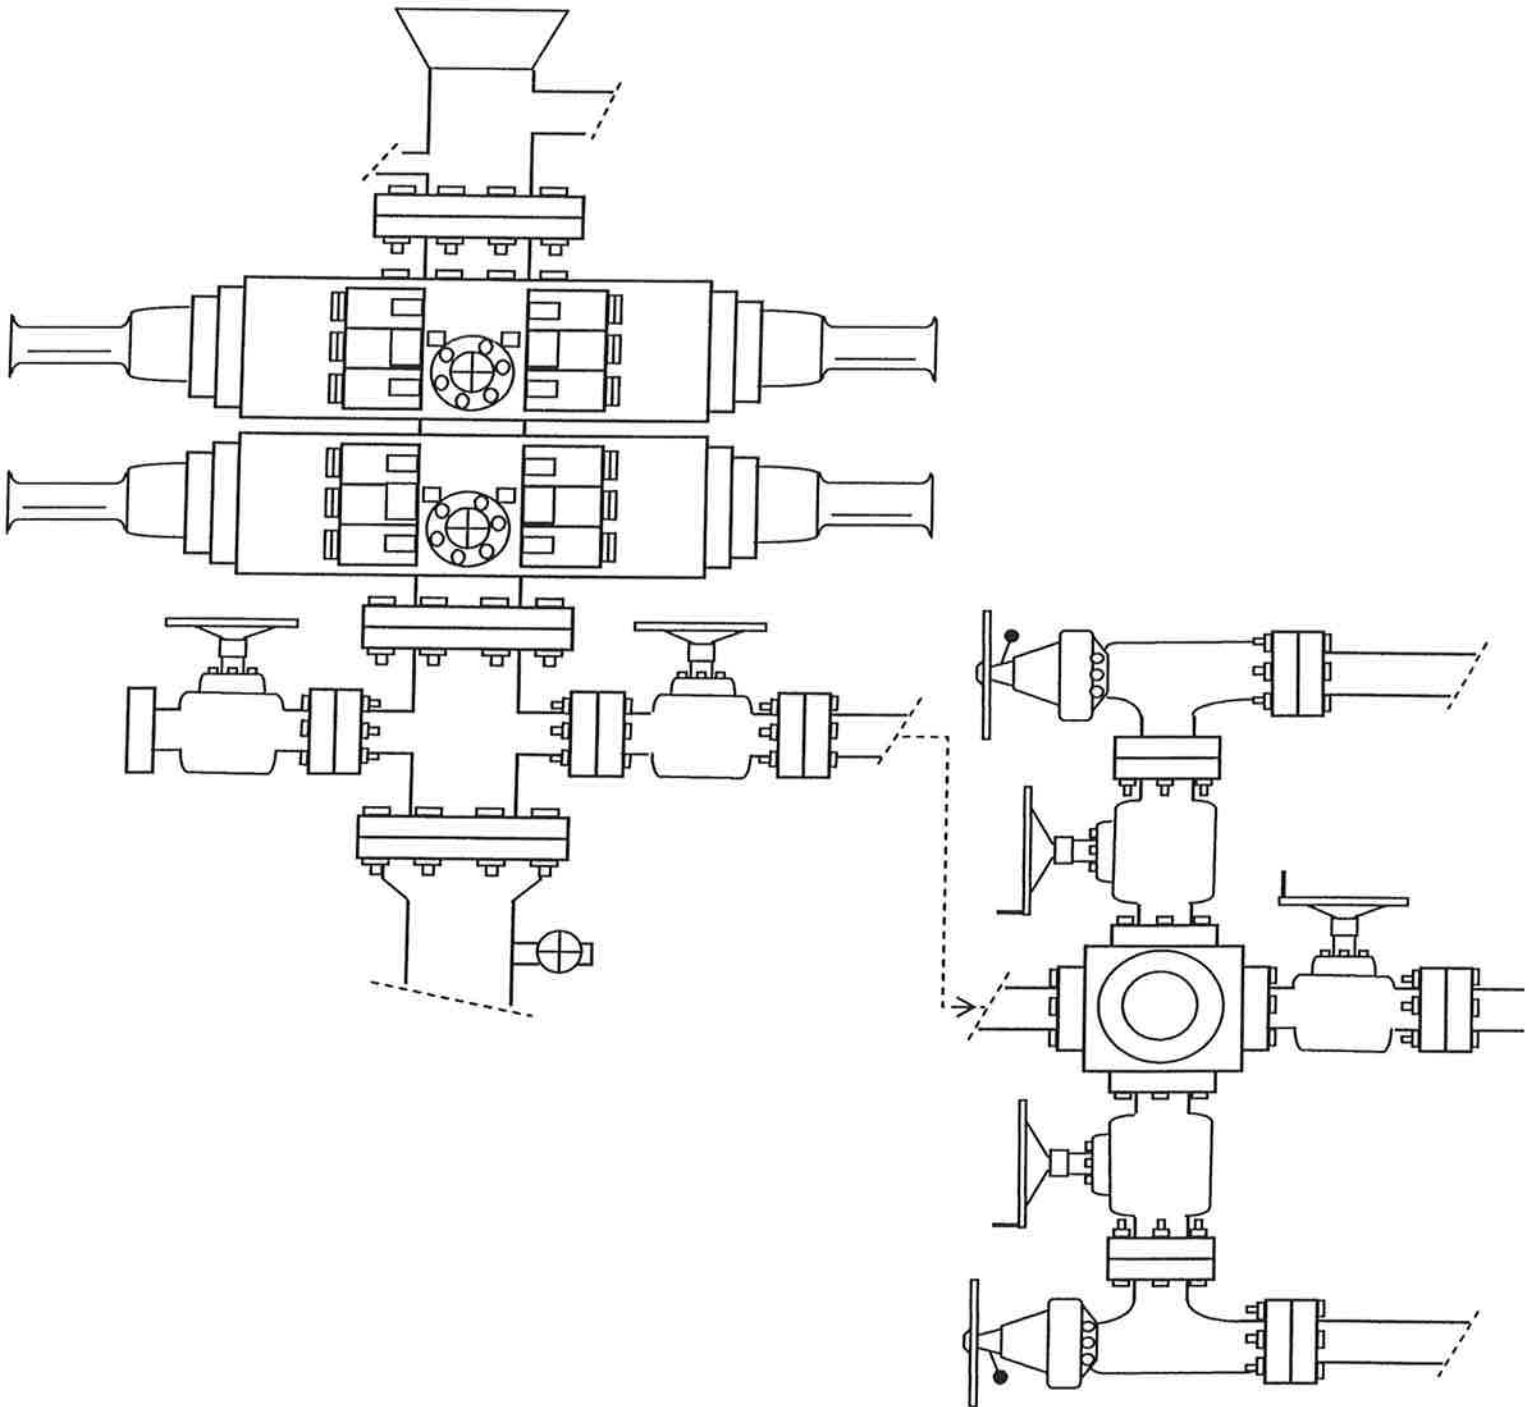


EXHIBIT C



# NEWFIELD EXPLORATION COMPANY


## WELL PAD INTERFERENCE PLAT

D-3-9-17 (Proposed Well)

A-4-9-17 (Proposed Well)

13-34-8-17 (Existing Well)

Pad Location: SWSW Section 34, T8S, R17E, S.L.B.&M.



### TOP HOLE FOOTAGES


D-3-9-17 (PROPOSED)
466' FSL & 424' FWL
A-4-9-17 (PROPOSED)
459' FSL & 404' FWL

### CENTER OF PATTERN FOOTAGES

D-3-9-17 (PROPOSED)
10' FNL & 1330' FWL
A-4-9-17 (PROPOSED)
30' FNL & 40' FEL

### BOTTOM HOLE FOOTAGES

D-3-9-17 (PROPOSED)
151' FNL & 1599' FWL
A-4-9-17 (PROPOSED)
166' FNL & 163' FEL

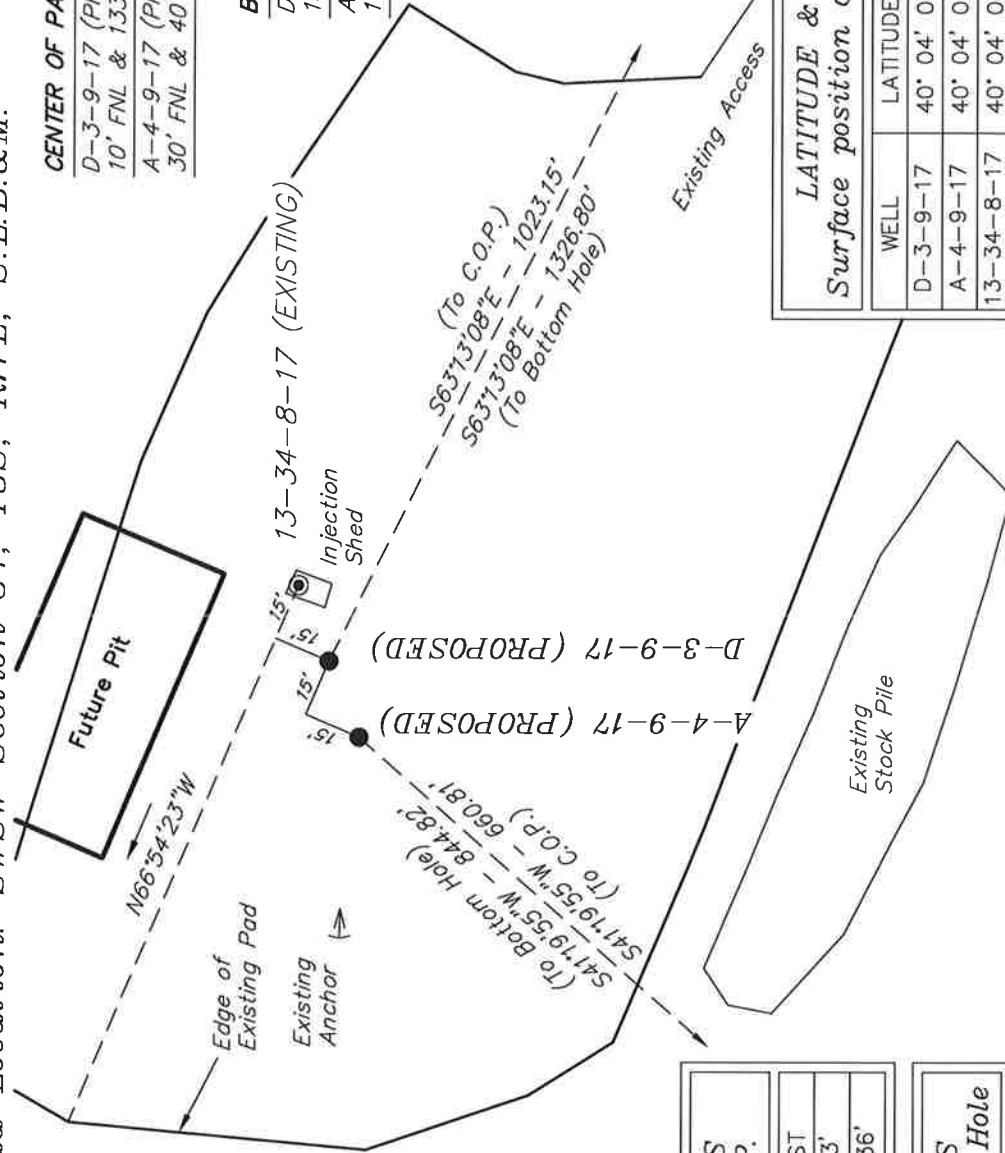

### RELATIVE COORDINATES From Top Hole to C.O.P.

WELL	NORTH	EAST
D-3-9-17	-461'	913'
A-4-9-17	-496'	-436'

### RELATIVE COORDINATES From Top Hole to Bottom Hole

WELL	NORTH	EAST
D-3-9-17	-598'	1185'
A-4-9-17	-634'	-558'

### LATITUDE & LONGITUDE Surface position of Wells (NAD 83)

WELL	LATITUDE	LONGITUDE
D-3-9-17	40° 04' 06.48"	110° 00' 02.18"
A-4-9-17	40° 04' 06.40"	110° 00' 02.44"
13-34-8-17	40° 04' 06.55"	110° 00' 01.93"

**Note:**  
Bearings are based  
on GPS Observations.

SURVEYED BY: C.M.	DATE SURVEYED: 01-23-11	<b>Tri State</b> Land Surveying, Inc. (435) 781-2501 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
DRAWN BY: M.W.	DATE DRAWN: 02-09-11	
SCALE: 1" = 50'	REVISED:	

# NEWFIELD EXPLORATION COMPANY


## LOCATION LAYOUT

D-3-9-17 (Proposed Well)

A-4-9-17 (Proposed Well)

13-34-8-17 (Existing Well)

Pad Location: SWSW Section 34, T8S, R17E, S.L.B.&M.

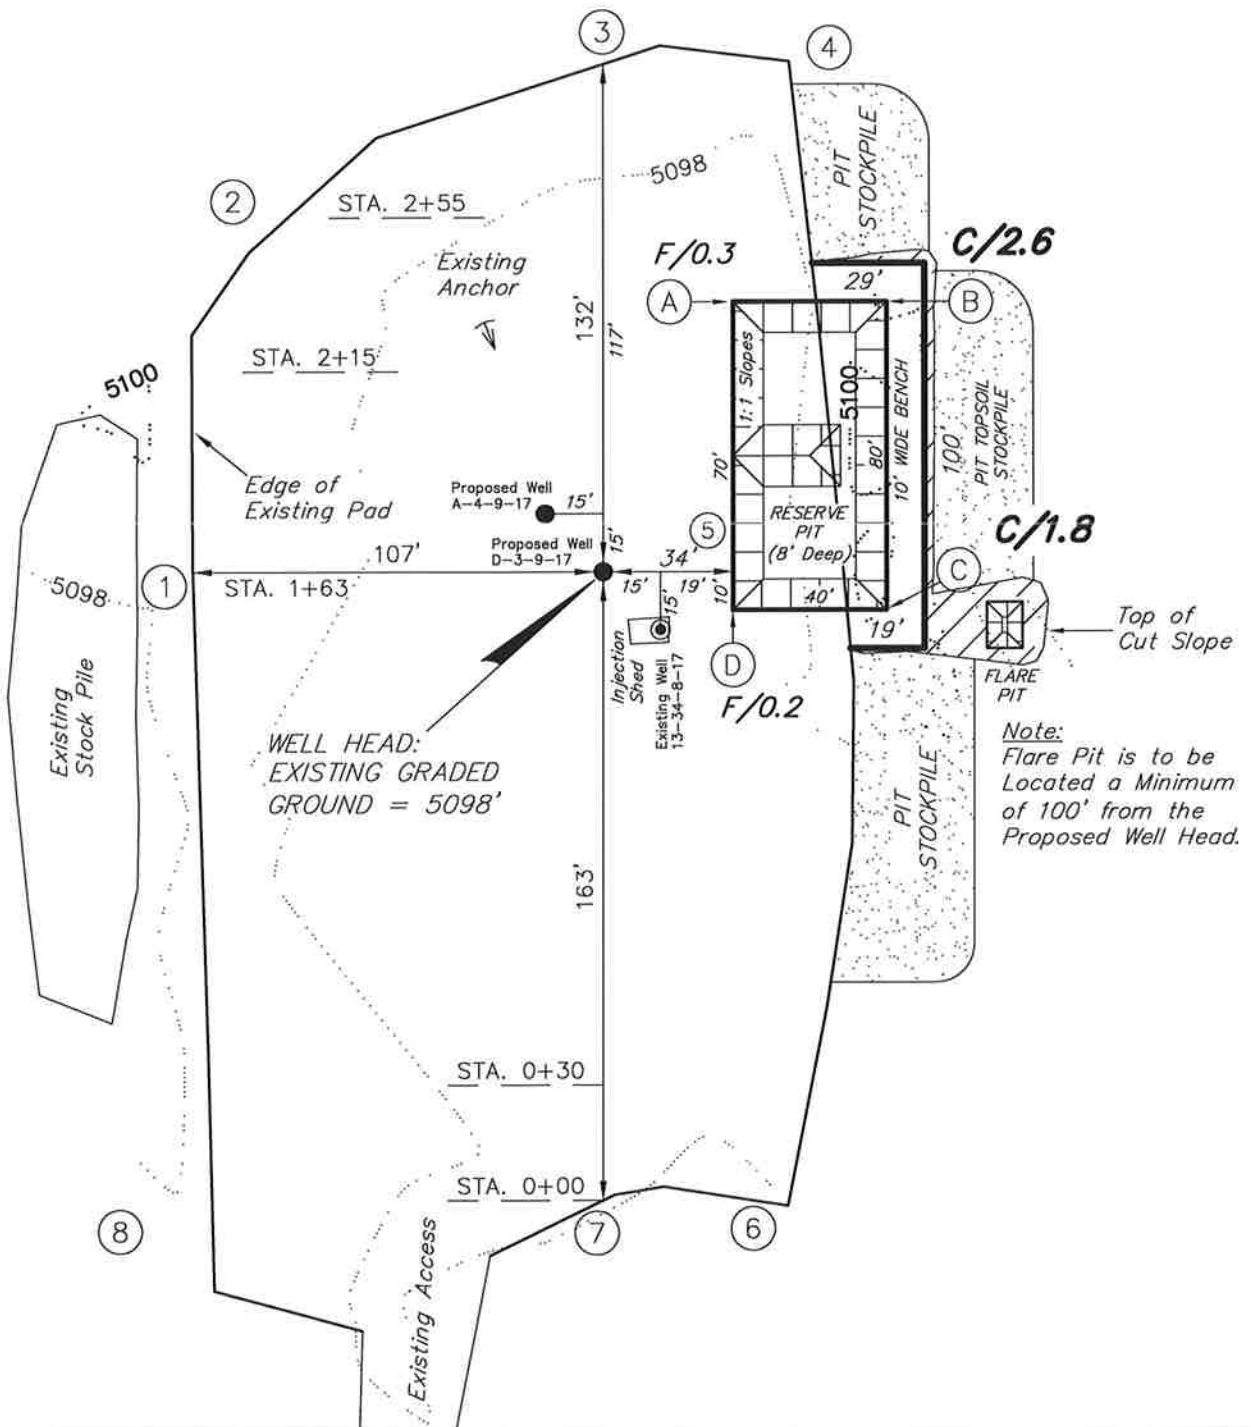

SURVEYED BY: C.M.	DATE SURVEYED: 01-23-11
DRAWN BY: M.W.	DATE DRAWN: 02-09-11
SCALE: 1" = 50'	REVISED:

**Tri State**  
Land Surveying, Inc.  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078  
(435) 781-2501

# NEWFIELD EXPLORATION COMPANY




## CROSS SECTIONS

*D-3-9-17 (Proposed Well)*

*A-4-9-17 (Proposed Well)*

*13-34-8-17 (Existing Well)*

*Pad Location: SWSW Section 34, T8S, R17E, S.L.B.&M.*

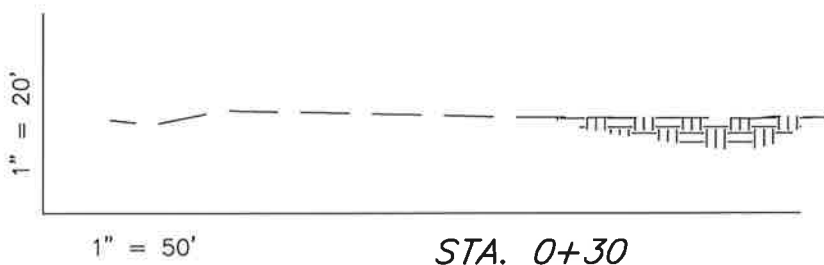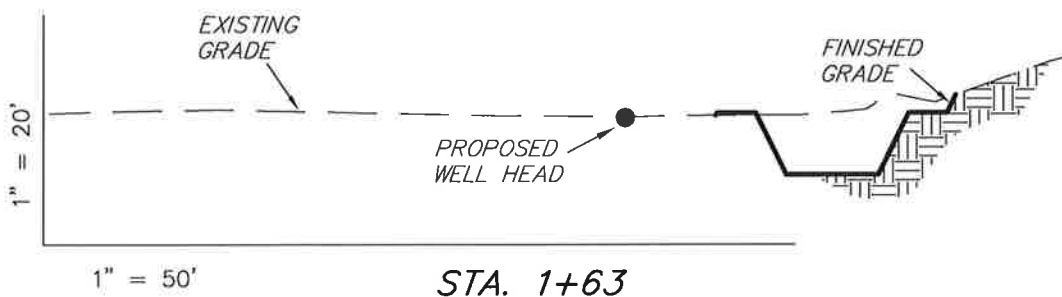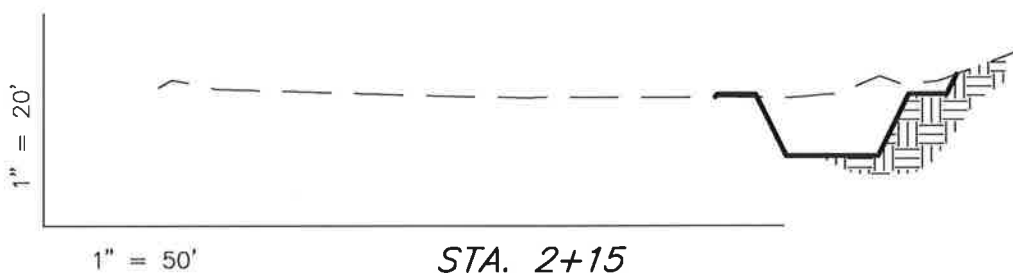

NOTE:  
UNLESS OTHERWISE NOTED  
CUT SLOPES ARE AT 1:1  
FILL SLOPES ARE AT 1.5:1

### ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	90	10	Topsoil is not included in Pad Cut	80
PIT	640	0		640
TOTALS	730	10	130	720

SURVEYED BY: C.M.

DATE SURVEYED: 01-23-11

DRAWN BY: M.W.

DATE DRAWN: 02-09-11

SCALE: 1" = 50'

REVISED:


*Tri State* (435) 781-2501  
Land Surveying, Inc.  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: Jun. 07, 2011



# Newfield Production Company Proposed Site Facility Diagram

GMBU A-4-9-17  
From the 13-34-8-17 Location  
SW/SW Sec. 34, T8S, R17E  
Duchesne County, Utah  
UTU-79017

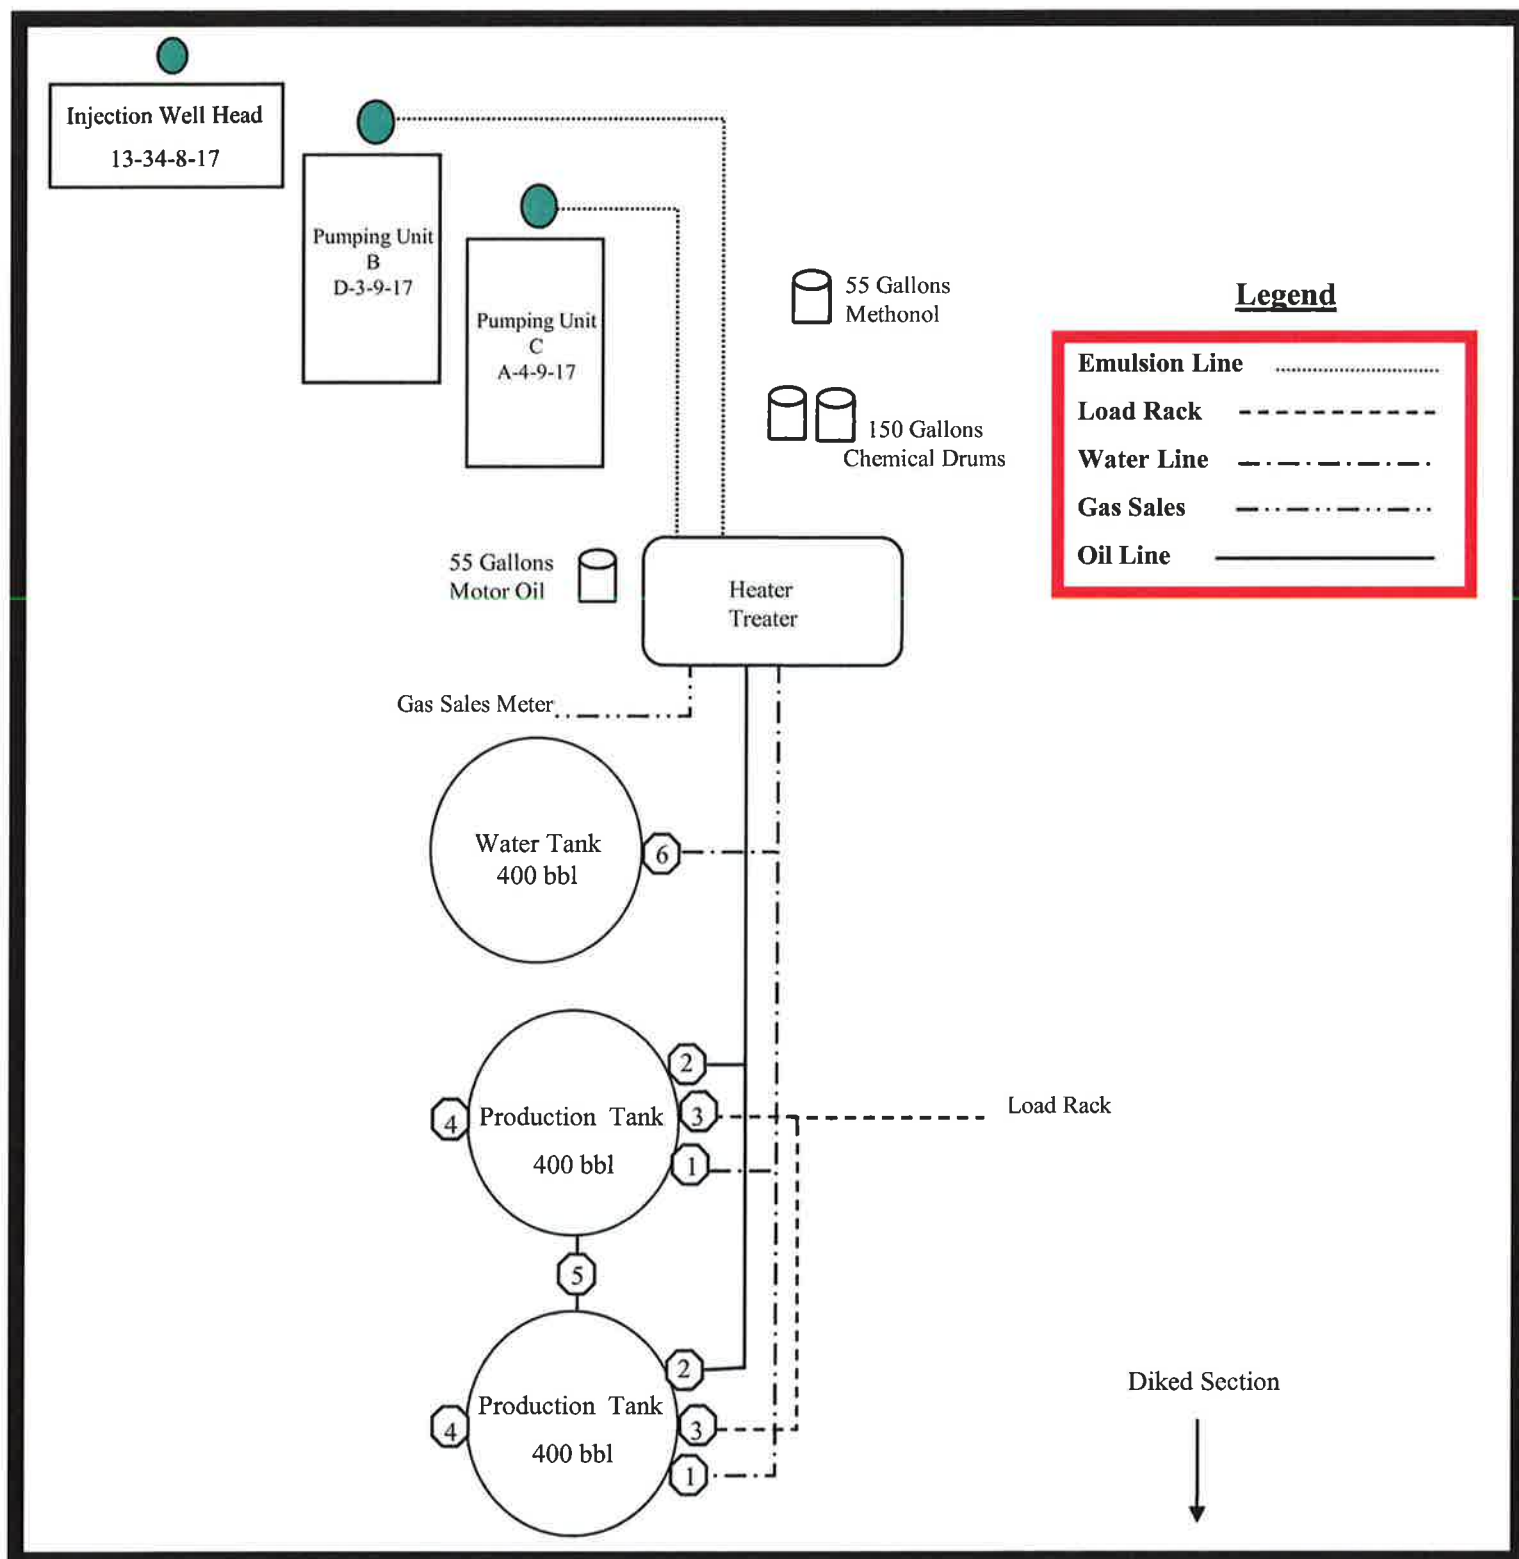



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:  
3160  
(UT-922)

June 3, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2011 Plan of Development Greater Monument  
Butte Unit, Duchesne and Uintah Counties,  
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50787	GMBU K-16-9-17	Sec 16 T09S R17E 1964 FSL 0665 FEL BHL Sec 16 T09S R17E 2630 FSL 0100 FEL
43-013-50788	GMBU H-16-9-17	Sec 16 T09S R17E 1979 FNL 1951 FEL BHL Sec 16 T09S R17E 0993 FNL 2566 FWL
43-013-50789	GMBU S-32-8-16	Sec 32 T08S R16E 1944 FSL 0558 FEL BHL Sec 32 T08S R16E 1162 FSL 1486 FEL
43-013-50790	GMBU I-16-9-17	Sec 16 T09S R17E 1964 FNL 1935 FEL BHL Sec 16 T09S R17E 1162 FNL 1018 FEL
43-013-50791	GMBU L-16-9-17	Sec 16 T09S R17E 1853 FSL 1836 FEL BHL Sec 16 T09S R17E 2577 FNL 1072 FEL
43-013-50792	GMBU R-16-9-17	Sec 16 T09S R17E 0587 FSL 1961 FEL BHL Sec 16 T09S R17E 1460 FSL 2465 FWL
43-013-50793	GMBU S-16-9-17	Sec 16 T09S R17E 1943 FSL 0669 FEL BHL Sec 16 T09S R17E 1007 FSL 1564 FEL
43-013-50794	GMBU M-16-9-17	Sec 16 T09S R17E 1838 FSL 1850 FEL BHL Sec 16 T09S R17E 2444 FNL 2491 FWL

RECEIVED: Jun. 07, 2011

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-047-51629	GMBU H-35-8-17	Sec 35 T08S R17E 2078 FNL 2203 FEL BHL Sec 35 T08S R17E 1115 FNL 2573 FEL
43-047-51630	GMBU I-35-8-17	Sec 35 T08S R17E 2060 FNL 2191 FEL BHL Sec 35 T08S R17E 1337 FNL 1327 FEL
43-047-51631	GMBU L-35-8-17	Sec 35 T08S R17E 2029 FNL 0710 FEL BHL Sec 35 T08S R17E 2445 FSL 1604 FEL
43-047-51632	GMBU O-36-8-17	Sec 35 T08S R17E 2011 FNL 0700 FEL BHL Sec 36 T08S R17E 2422 FSL 0259 FWL
43-047-51633	GMBU R-35-8-17	Sec 35 T08S R17E 2008 FSL 2193 FWL BHL Sec 35 T08S R17E 0942 FSL 2467 FEL
43-013-50798	GMBU Q-22-8-17	Sec 22 T08S R17E 0565 FSL 0820 FWL BHL Sec 22 T08S R17E 1203 FSL 1693 FWL
43-047-51634	GMBU P-25-8-17	Sec 25 T08S R17E 0735 FSL 0615 FWL BHL Sec 25 T08S R17E 1398 FSL 0009 FWL
43-047-51635	GMBU Q-25-8-17	Sec 25 T08S R17E 0755 FSL 0620 FWL BHL Sec 25 T08S R17E 1475 FSL 1559 FWL
43-047-51636	GMBU M-35-8-17	Sec 35 T08S R17E 2029 FSL 2197 FWL BHL Sec 35 T08S R17E 2600 FNL 2502 FEL
43-013-50799	GMBU D-3-9-17	Sec 34 T08S R17E 0466 FSL 0424 FWL BHL Sec 03 T09S R17E 0151 FNL 1599 FWL
43-013-50800	GMBU A-4-9-17	Sec 34 T08S R17E 0459 FSL 0404 FWL BHL Sec 04 T09S R17E 0030 FNL 0040 FEL

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard  
DN: cn=Michael L. Coulthard, o=Bureau of Land Management,  
ou=Branch of Minerals, email=Michael\_Coulthard@blm.gov, c=US  
Date: 2011.06.03 08:24:54 -06'00'

bcc: File - Greater Monument Butte Unit  
Division of Oil Gas and Mining  
Central Files  
Agr. Sec. Chron  
Fluid Chron

MCoulthard:mc:6-3-11



VIA ELECTRONIC DELIVERY

June 2, 2011

State of Utah, Division of Oil, Gas and Mining  
ATTN: Diana Mason  
P.O. Box 145801  
Salt Lake City, UT 84114-5801

RE: Directional Drilling  
**GMBU A-4-9-17**  
Greater Monument Butte (Green River) Unit

Surface Hole: T8S-R17E Section 34: SWSW (UTU-79017)  
459' FSL 404' FWL

At Target: T9S-R17E Section 4: NENE(Lot 1) (UTU-75038)  
30' FNL 40' FEL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 5/20/2011, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4153 or by email at [pburns@newfield.com](mailto:pburns@newfield.com). Your consideration in this matter is greatly appreciated.

Sincerely,  
Newfield Production Company

A handwritten signature in blue ink, appearing to read "Peter Burns".

Peter Burns  
Land Associate

Form 3160-3  
(August 2007)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**APPLICATION FOR PERMIT TO DRILL OR REENTER**

FORM APPROVED  
OMU No. 1004-0137  
Expires July 31, 2010

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-79017
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name NA
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. Greater Monument Butte
3a. Address Route #3 Box 3630, Myton UT 84052		8. Lease Name and Well No. GMBU A-4-9-17
3b. Phone No. (include area code) (435) 646-3721		9. API Well No.
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface SW/SW 459' FSL 404' FWL Sec. 34, T8S R17E (UTU-79017) At proposed prod. zone NE/NE (Lot #1) 30' FNL 40' FEL Sec. 4, T9S R17E (UTU-75038)		10. Field and Pool, or Exploratory Monument Butte
11. Sec., T. R. M. or Blk. and Survey or Area Sec. 34, T8S R17E		12. County or Parish Duchesne
13. State UT		14. Distance in miles and direction from nearest town or post office* Approximately 16.2 miles southeast of Myton, UT
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 30' f/ise, NA f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease 160.00	17. Spacing Unit dedicated to this well 20 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1,419'	19. Proposed Depth 6,206'	20. BLM/BIA Bond No. on file WYB000493
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5098' GL	22. Approximate date work will start* 3-22-2011	23. Estimated duration (7) days from SPUD to rig release

## 24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- |   |   |
|---|---|
| 1. Well plat certified by a registered surveyor.<br>2. A Drilling Plan.<br>3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).<br>5. Operator certification<br>6. Such other site specific information and/or plans as may be required by the BLM. |
|---|---|

25. Signature 	Name (Printed Type) Mandia Crozier	Date 5/20/11
Title Regulatory Specialist		
Approved by (Signature)	Name (Printed Type)	Date
Title	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)

# R17E, S.L.B.&M.

N89°59'W - 80.02 (G.L.O.)

S89°09'07"W - 2644.55' (Meas.) S89°11'52"W - 2643.60' (Meas.)

1910 Brass Cap 1910 Brass Cap 1910 Brass Cap

N00°53'48"W - 2647.70' (Meas.) N00°49'35"W - 2619.38' (Meas.)

1910 Brass Cap 1910 Brass Cap

N00°52'10"W - 2640.52' (Meas.) N00°44'12"W - 2621.77' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)


1910 Brass Cap 1910 Brass Cap

N89°01'56"E - 2641.93' (Meas.) N88°17'42"E - 2637.22' (Meas.)

1910 Brass Cap 1910 Brass Cap

## NEWFIELD EXPLORATION COMPANY

WELL LOCATION, A-4-9-17, LOCATED AS SHOWN IN THE SW 1/4 SW 1/4 OF SECTION 34, T8S, R17E, S.L.B.&M., DUCHESNE COUNTY, UTAH.



### NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Bottom of Hole bears S41°19'55"W 844.82' from the Well head.

◆ = SECTION CORNERS LOCATED

THIS IS TO CERTIFY THAT THE ABOVE SURVEY WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION, AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. 189377

STACY W.  
REGISTERED LAND SURVEYOR  
EXPIRATION DATE 12-15-11  
STATE OF UTAH

**TRI STATE LAND SURVEYING & CONSULTING**  
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078  
(435) 781-2501


DATE SURVEYED: 01-23-11	SURVEYED BY: C.M.
DATE DRAWN: 02-09-11	DRAWN BY: M.W.
REVISED:	SCALE: 1" = 1000'

### WELL LOCATION:

A-4-9-17

ELEV. EXIST. GRADED GROUND = 5098'

34




### Detail


No Scale


A-4-9-17  
(Surface Location) NAD 83  
LATITUDE = 40° 04' 06.40"  
LONGITUDE = 110° 00' 02.44"

BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

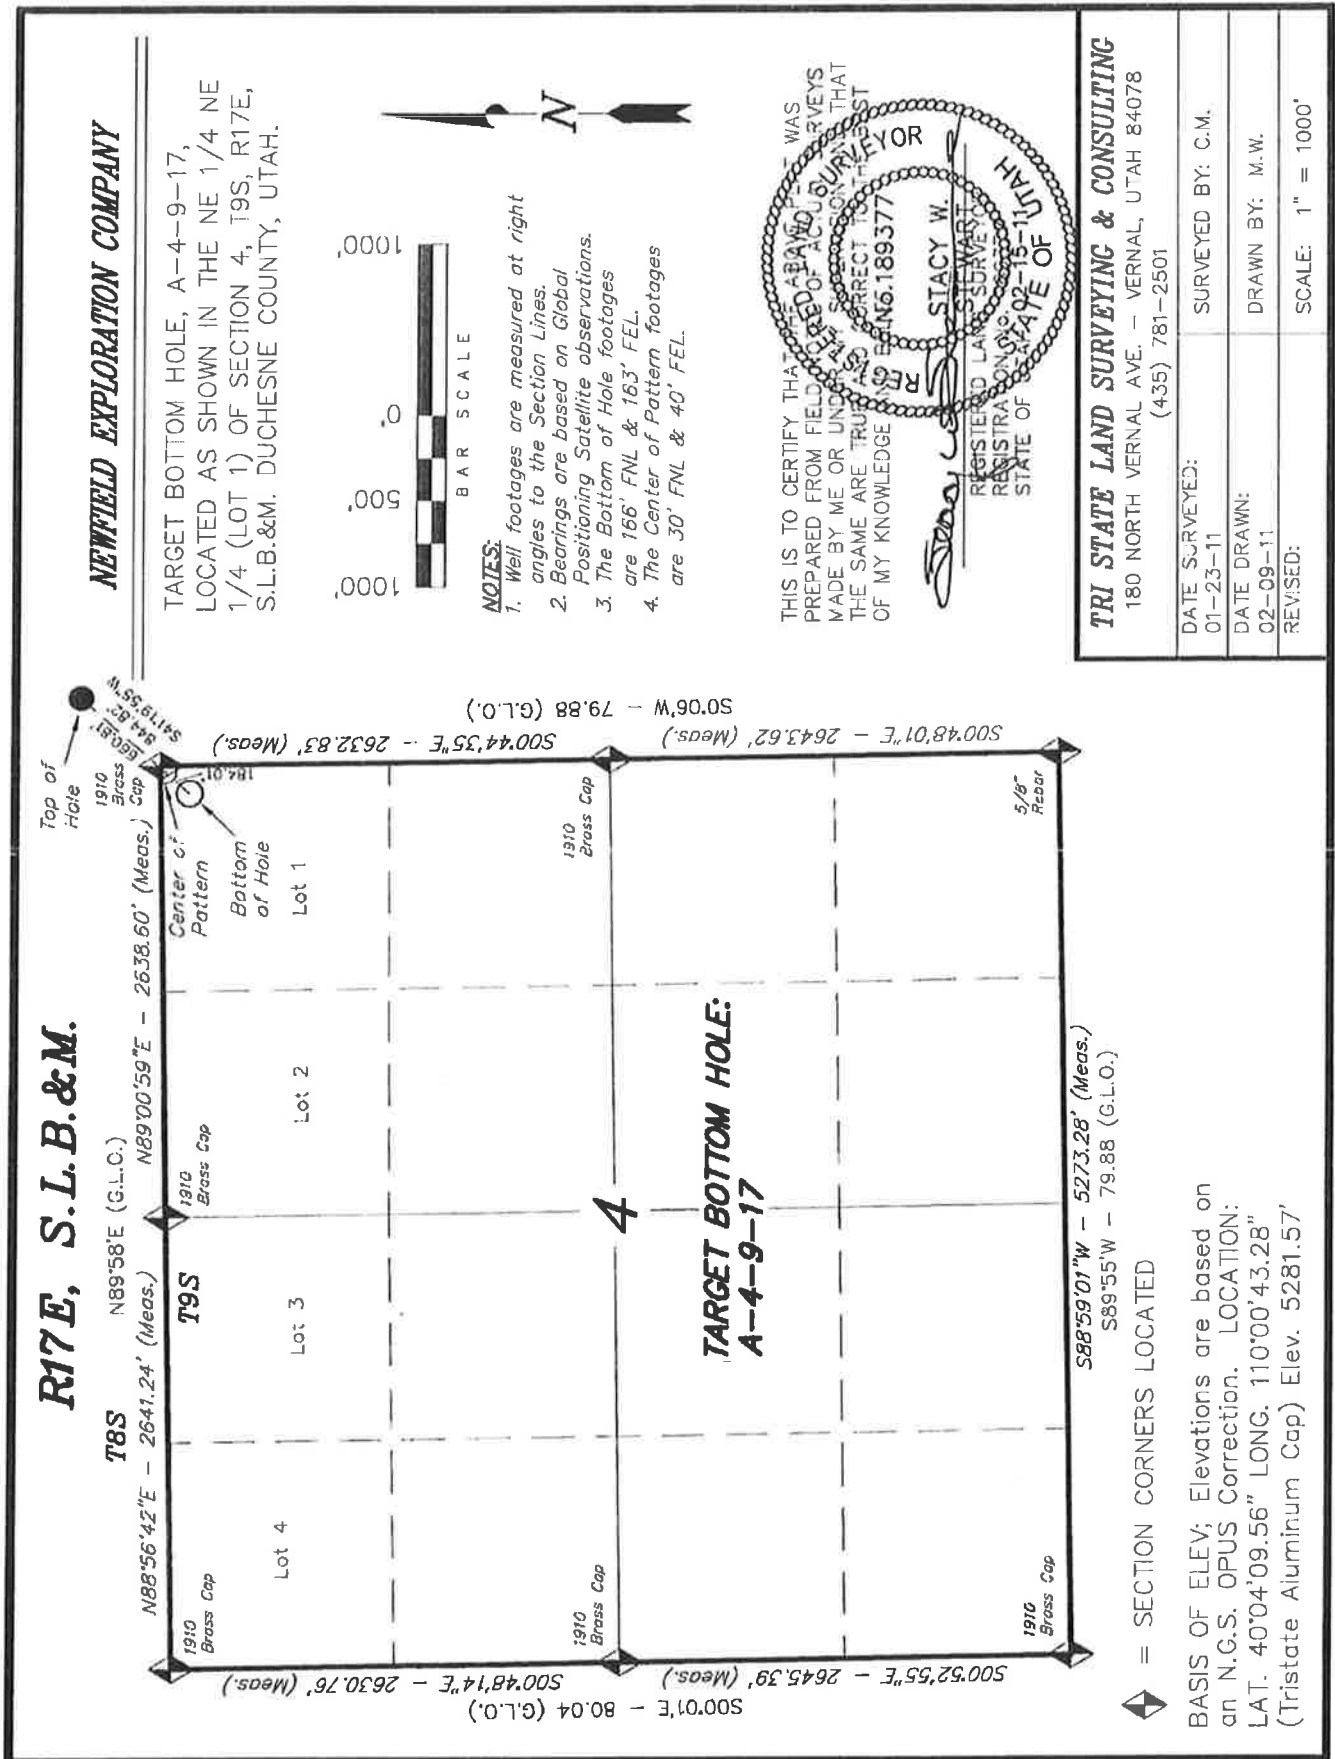





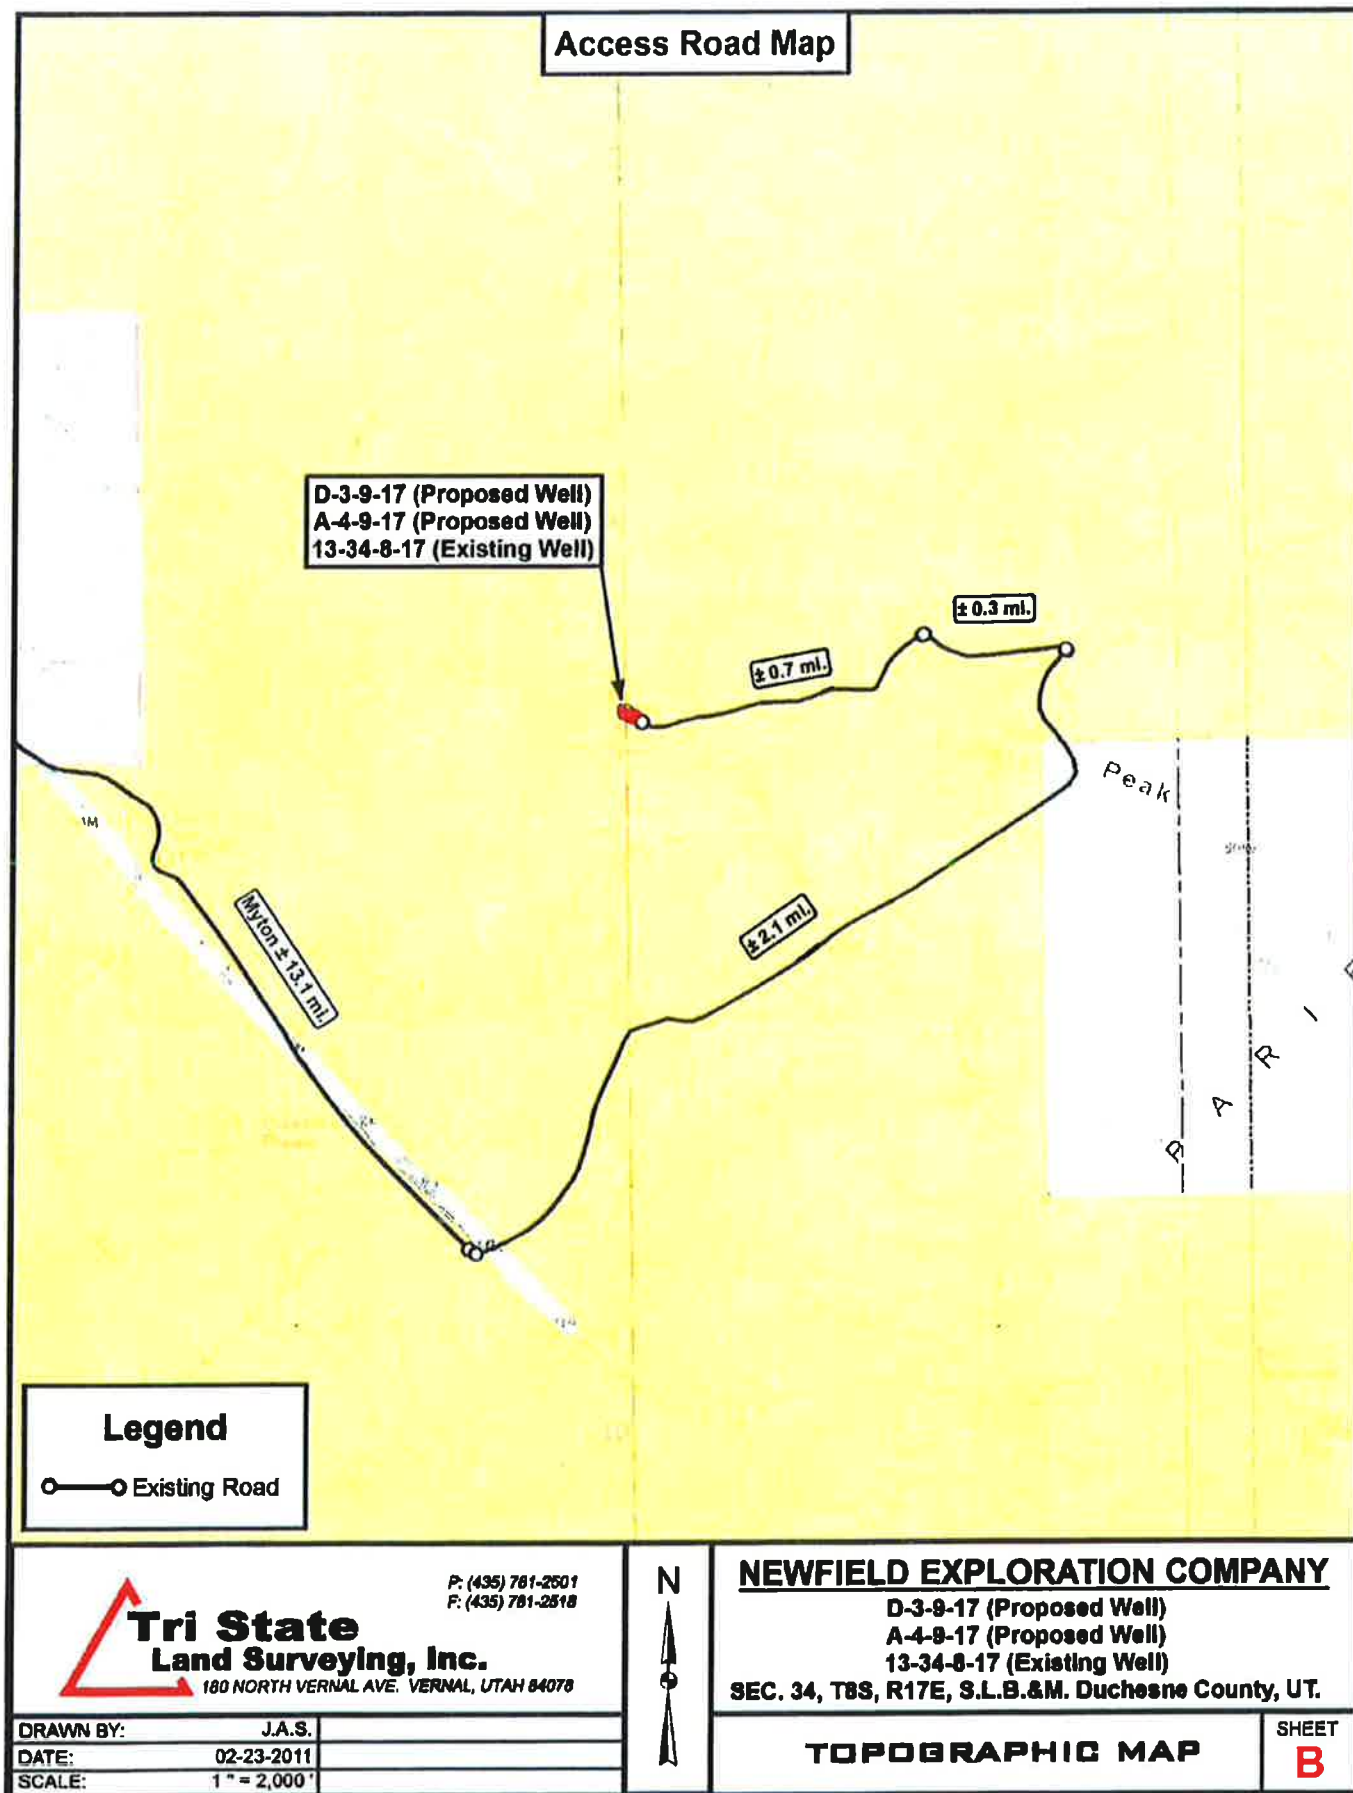

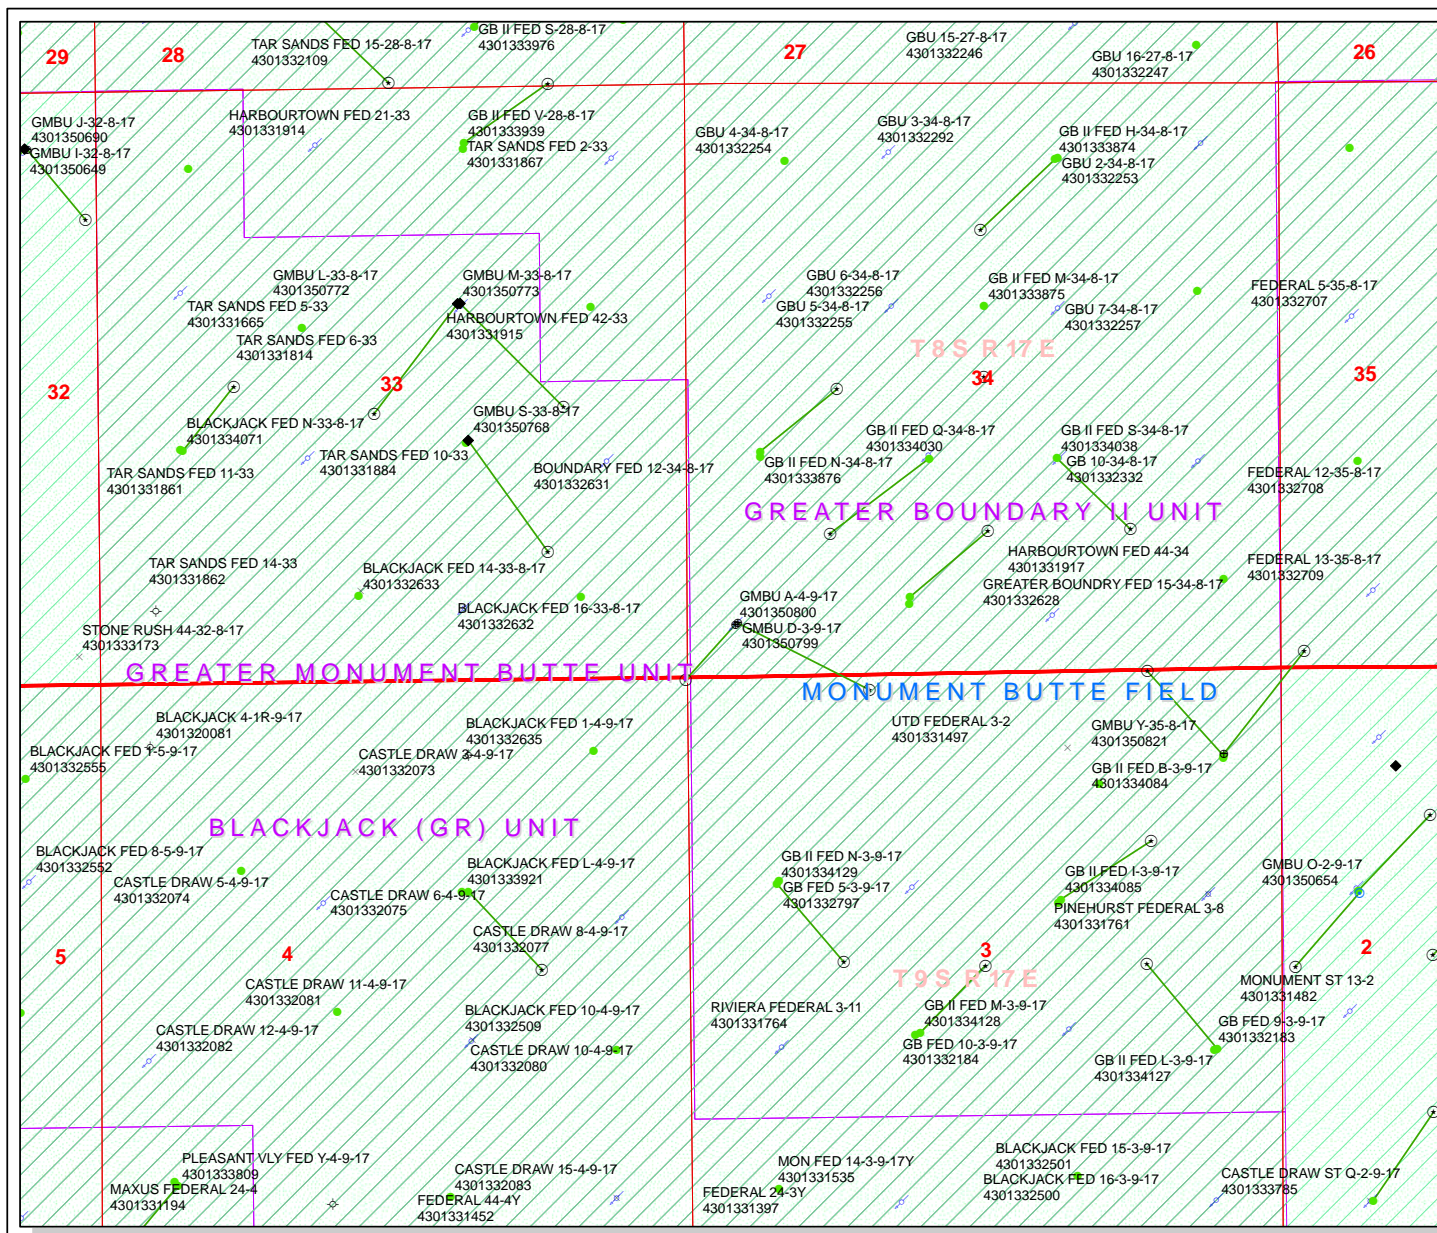

**API Number: 4301350800**  
**Well Name: GMBU A-4-9-17**  
**Township T0.8 . Range R1.7 . Section 34**  
**Meridian: SLBM**  
**Operator: NEWFIELD PRODUCTION COMPANY**

Map Prepared:  
 Map Produced by Diana Mason

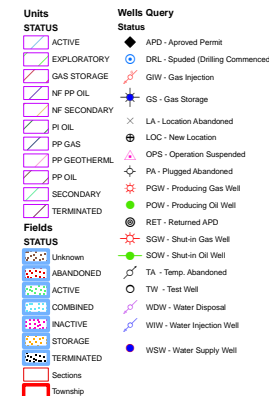



## WORKSHEET APPLICATION FOR PERMIT TO DRILL

**APD RECEIVED:** 5/31/2011**API NO. ASSIGNED:** 43013508000000**WELL NAME:** GMBU A-4-9-17**OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695)**PHONE NUMBER:** 435 646-4825**CONTACT:** Mandie Crozier**PROPOSED LOCATION:** SWSW 34 080S 170E**Permit Tech Review:** ☒**SURFACE:** 0459 FSL 0404 FWL**Engineering Review:** ☐**BOTTOM:** 0030 FNL 0040 FEL**Geology Review:** ☒**COUNTY:** DUCHESNE**LATITUDE:** 40.06850**LONGITUDE:** -109.99995**UTM SURF EASTINGS:** 585282.00**NORTHINGS:** 4435629.00**FIELD NAME:** MONUMENT BUTTE**LEASE TYPE:** 1 - Federal**LEASE NUMBER:** UTU-79017**PROPOSED PRODUCING FORMATION(S):** GREEN RIVER**SURFACE OWNER:** 1 - Federal**COALBED METHANE:** NO**RECEIVED AND/OR REVIEWED:**☒ **PLAT**☒ **Bond:** FEDERAL - WYB000493☐ **Potash**☐ **Oil Shale 190-5**☐ **Oil Shale 190-3**☐ **Oil Shale 190-13**☒ **Water Permit:** 437478☐ **RDCC Review:**☐ **Fee Surface Agreement**☐ **Intent to Commingle****Commingle Approved****LOCATION AND SITING:**☐ **R649-2-3.****Unit:** GMBU (GRRV)☐ **R649-3-2. General**☐ **R649-3-3. Exception**☒ **Drilling Unit****Board Cause No:** Cause 213-11**Effective Date:** 11/30/2009**Siting:** Suspends General Siting☒ **R649-3-11. Directional Drill****Comments:** Presite Completed**Stipulations:**  
4 - Federal Approval - dmason  
15 - Directional - dmason  
27 - Other - bhill**RECEIVED:** Jun. 07, 2011



GARY R. HERBERT  
Governor

GREGORY S. BELL  
Lieutenant Governor

## State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

### Permit To Drill

\*\*\*\*\*

**Well Name:** GMBU A-4-9-17  
**API Well Number:** 43013508000000  
**Lease Number:** UTU-79017  
**Surface Owner:** FEDERAL  
**Approval Date:** 6/7/2011

**Issued to:**

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

**Authority:**

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

**Duration:**

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

**General:**

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

**Conditions of Approval:**

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

**Notification Requirements:**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)  
OR  
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>

**Reporting Requirements:**

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

**Approved By:**

A handwritten signature in black ink, appearing to read "John Rogers", written over a horizontal line.

For John Rogers  
Associate Director, Oil & Gas

# RECEIVED

FORM APPROVED  
OMB No. 1004-0137  
Expires July 31, 2010

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

JUN 01 2011


## APPLICATION FOR PERMIT TO DRILL ON BLM Vernal Utah


1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-79017
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name NA
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. Greater Monument Butte
3a. Address Route #3 Box 3630, Myton UT 84052		8. Lease Name and Well No. GMBU A-4-9-17
3b. Phone No. (include area code) (435) 646-3721		9. API Well No. 43-013-50800
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface SW/SW 459' FSL 404' FWL Sec. 34, T8S R17E (UTU-79017) At proposed prod. zone NE/NE (Lot #1) 30' FNL 40' FEL Sec. 4, T9S R17E (UTU-75038)		10. Field and Pool, or Exploratory Monument Butte
14. Distance in miles and direction from nearest town or post office* Approximately 16.2 miles southeast of Myton, UT		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 34, T8S R17E
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 30' f/lse, NA f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease 160.00	17. Spacing Unit dedicated to this well 20 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1,419'	19. Proposed Depth 6,206'	20. BLM/BIA Bond No. on file WYB000493
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5098' GL	22. Approximate date work will start* 3rd Qtr. 2011	23. Estimated duration (7) days from SPUD to rig release

### 24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- |  |   |
|--|---|
| 1. Well plat certified by a registered surveyor.   | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan.  | 5. Operator certification   |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM.             |

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 5/20/11
Title Regulatory Specialist		

Approved by (Signature) 	Name (Printed/Typed) Jerry Kenczka	Date JAN 04 2012
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

### CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)

JAN 10 2012

DIV. OF OIL, GAS & MINING

## UDOGM

## NOS

## AFMSS# 113XS0547A

## NOTICE OF APPROVAL





UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL**

Company: Newfield Production Company  
Well No: GMBU A-4-9-17  
API No: 43-013-50800

Location: SWSW, Sec. 34, T8S, R17E  
Lease No: UTU-79017  
Agreement: Greater Monument Butte

**OFFICE NUMBER: (435) 781-4400**

**OFFICE FAX NUMBER: (435) 781-3420**

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

**NOTIFICATION REQUIREMENTS**

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: <a href="mailto:blm_ut_vn_opreport@blm.gov">blm ut vn opreport@blm.gov</a>
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO<sub>x</sub> per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO<sub>x</sub> per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.
- After cessation of drilling and completion operations, any visible or measurable layer of oil must be removed from the surface of the reserve pit and the pit kept free of oil.
- Pits must be free of oil and other liquid and solid wastes prior to filling. Pit liners must not be breached (cut) or filled (squeezed) while still containing fluids. The pit liner must be removed to the solids level or treated to prevent its reemergence to the surface or its interference with long-term successful revegetation.

**Paleontological**

- It is recommended that a permitted paleontologist monitor all surface disturbing activities to protect scientifically significant fossils.

**Archaeological**

- Avoid "eligible" National Register of Historic Places sites 42Dc1730, 42Dc541, and 42Dc1731

**Wildlife**

*If* construction and drilling is anticipated during any of the following wildlife seasonal or spatial restrictions, a qualified consulting firm biologist must be contacted in order to conduct applicable surveys using an accepted protocol prior to any ground disturbing activities.

- A BLM biologist or a BLM-approved contractor will conduct a raptor nest survey during the nesting season within 0.5 miles from the respective host location well pad and liquid gathering line corridor. If occupied/active raptor nests are found, construction will not occur during the nesting season for that species within the species-specific buffer described in the BLM Raptor Best Management Practices. If during the surveys known nests/habitat is found to be inactive, an exemption may be requested in writing and approved by the BLM Authorized Officer.
- The Lessee/Operator has been given notice that the area has been identified as containing golden eagle nests/habitat. Modifications may be required in the Surface Use Plan to protect golden eagle nests/habitat from surface disturbing activities in accordance with Section 6 of the lease terms, ESA and 43 CFR3101.1-2. No surface occupancy or use is allowed within ½ mile of golden eagle nests from January 1 through August 31. If during the surveys known nests/habitat is found to be inactive, an exemption may be requested in writing and approved by the BLM Authorized Officer.

- Mountain plover surveys will be conducted to protocol by a professional Environmental Consulting Firm biologist prior to any ground disturbing activities. Reports from survey results must be reviewed by a BLM minerals biologist prior to proceeding with the proposed project. A seasonal restriction for all ground disturbing activities in mountain plover habitat from May 1-June 15 is required.
- If ground disturbing activities are anticipated within 0.25 miles of great horned owl nests no surface occupancy or use is allowed from December 1 to September 30. If during the surveys known nests/habitat is found to be inactive, an exemption may be requested in writing and approved by the BLM Authorized Officer.

### **Reclamation**

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.
- The reclamation seed mix will incorporate low growing grasses, instead of crested wheatgrass, which negatively impacts mountain plover habitat.
- Appropriate erosion control and revegetation measures will be employed. In areas with unstable soils where seeding alone may not adequately control erosion, grading will be used to minimize slopes and water bars will be installed on disturbed slopes. Erosion control efforts will be monitored by Newfield and, if necessary, modifications will be made to control erosion.

### **Monitoring and Reporting**

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

**DOWNHOLE PROGRAM  
CONDITIONS OF APPROVAL (COAs)**

**SITE SPECIFIC DOWNHOLE COAs:**

- Newfield Production Co. shall comply with all applicable requirements in the SOP (version: "Greater Monument Butte Green River Development Program", June 24, 2008). The operator shall also comply with applicable laws and regulations; with lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

**All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to.** The following items are emphasized:

**DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB



or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to BLM\_UT\_VN\_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

## OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at [www.ONRR.gov](http://www.ONRR.gov).
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - Operator name, address, and telephone number.
  - Well name and number.
  - Well location (¼¼, Sec., Twn, Rng, and P.M.).
  - Date well was placed in a producing status (date of first production for which royalty will be paid).
  - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - Unit agreement and/or participating area name and number, if applicable.
  - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs,

core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-79017
<b>1. TYPE OF WELL</b> Oil Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
<b>2. NAME OF OPERATOR:</b> NEWFIELD PRODUCTION COMPANY		<b>7. UNIT or CA AGREEMENT NAME:</b> GMBU (GRRV)
<b>3. ADDRESS OF OPERATOR:</b> Rt 3 Box 3630 , Myton, UT, 84052		<b>8. WELL NAME and NUMBER:</b> GMBU A-4-9-17
<b>PHONE NUMBER:</b> 435 646-4825 Ext		<b>9. API NUMBER:</b> 43013508000000
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0459 FSL 0404 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWSW Section: 34 Township: 08.0S Range: 17.0E Meridian: S		<b>9. FIELD and POOL or WILDCAT:</b> MONUMENT BUTTE
		<b>COUNTY:</b> DUCHESNE
		<b>STATE:</b> UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: <b>6/7/2012</b>	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"><input type="checkbox"/> ACIDIZE</div> <div style="width: 33%;"><input type="checkbox"/> ALTER CASING</div> <div style="width: 33%;"><input type="checkbox"/> CASING REPAIR</div> <div style="width: 33%;"><input type="checkbox"/> CHANGE TO PREVIOUS PLANS</div> <div style="width: 33%;"><input type="checkbox"/> CHANGE TUBING</div> <div style="width: 33%;"><input type="checkbox"/> CHANGE WELL NAME</div> <div style="width: 33%;"><input type="checkbox"/> CHANGE WELL STATUS</div> <div style="width: 33%;"><input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS</div> <div style="width: 33%;"><input type="checkbox"/> CONVERT WELL TYPE</div> <div style="width: 33%;"><input type="checkbox"/> DEEPEN</div> <div style="width: 33%;"><input type="checkbox"/> FRACTURE TREAT</div> <div style="width: 33%;"><input type="checkbox"/> NEW CONSTRUCTION</div> <div style="width: 33%;"><input type="checkbox"/> OPERATOR CHANGE</div> <div style="width: 33%;"><input type="checkbox"/> PLUG AND ABANDON</div> <div style="width: 33%;"><input type="checkbox"/> PLUG BACK</div> <div style="width: 33%;"><input type="checkbox"/> PRODUCTION START OR RESUME</div> <div style="width: 33%;"><input type="checkbox"/> RECLAMATION OF WELL SITE</div> <div style="width: 33%;"><input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION</div> <div style="width: 33%;"><input type="checkbox"/> REPERFORATE CURRENT FORMATION</div> <div style="width: 33%;"><input type="checkbox"/> SIDETRACK TO REPAIR WELL</div> <div style="width: 33%;"><input type="checkbox"/> TEMPORARY ABANDON</div> <div style="width: 33%;"><input type="checkbox"/> TUBING REPAIR</div> <div style="width: 33%;"><input type="checkbox"/> VENT OR FLARE</div> <div style="width: 33%;"><input type="checkbox"/> WATER DISPOSAL</div> <div style="width: 33%;"><input type="checkbox"/> WATER SHUTOFF</div> <div style="width: 33%;"><input type="checkbox"/> SI TA STATUS EXTENSION</div> <div style="width: 33%;"><input checked="" type="checkbox"/> APD EXTENSION</div> <div style="width: 33%;"><input type="checkbox"/> WILDCAT WELL DETERMINATION</div> <div style="width: 33%;"><input type="checkbox"/> OTHER</div> </div>
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	
OTHER: <input style="width: 100px;" type="text"/>	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well  
for one year.

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Date:** June 04, 2012

**By:**

<b>NAME (PLEASE PRINT)</b> Mandie Crozier	<b>PHONE NUMBER</b> 435 646-4825	<b>TITLE</b> Regulatory Tech
<b>SIGNATURE</b> N/A	<b>DATE</b> 5/30/2012	





**The Utah Division of Oil, Gas, and Mining**

- State of Utah
- Department of Natural Resources

**Electronic Permitting System - Sundry Notices**

**Request for Permit Extension Validation Well Number 43013508000000**

**API:** 43013508000000

**Well Name:** GMBU A-4-9-17

**Location:** 0459 FSL 0404 FWL QTR SWSW SEC 34 TWNP 080S RNG 170E MER S

**Company Permit Issued to:** NEWFIELD PRODUCTION COMPANY

**Date Original Permit Issued:** 6/7/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Signature:** Mandie Crozier

**Date:** 5/30/2012

**Title:** Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>			
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-79017			
<b>1. TYPE OF WELL</b> Oil Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>			
<b>2. NAME OF OPERATOR:</b> NEWFIELD PRODUCTION COMPANY		<b>7. UNIT or CA AGREEMENT NAME:</b> GMBU (GRRV)			
<b>3. ADDRESS OF OPERATOR:</b> Rt 3 Box 3630 , Myton, UT, 84052		<b>8. WELL NAME and NUMBER:</b> GMBU A-4-9-17			
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0459 FSL 0404 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWSW Section: 34 Township: 08.0S Range: 17.0E Meridian: S		<b>9. API NUMBER:</b> 43013508000000			
<b>PHONE NUMBER:</b> 435 646-4825 Ext		<b>9. FIELD and POOL or WILDCAT:</b> MONUMENT BUTTE			
<b>COUNTY:</b> DUCHESNE		<b>STATE:</b> UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>				
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: <b>6/7/2013</b>  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE  <input type="checkbox"/> CHANGE TO PREVIOUS PLANS  <input type="checkbox"/> CHANGE WELL STATUS  <input type="checkbox"/> DEEPEN  <input type="checkbox"/> OPERATOR CHANGE  <input type="checkbox"/> PRODUCTION START OR RESUME  <input type="checkbox"/> REPERFORATE CURRENT FORMATION  <input type="checkbox"/> TUBING REPAIR  <input type="checkbox"/> WATER SHUTOFF  <input type="checkbox"/> WILDCAT WELL DETERMINATION         </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING  <input type="checkbox"/> CHANGE TUBING  <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS  <input type="checkbox"/> FRACTURE TREAT  <input type="checkbox"/> PLUG AND ABANDON  <input type="checkbox"/> RECLAMATION OF WELL SITE  <input type="checkbox"/> SIDETRACK TO REPAIR WELL  <input type="checkbox"/> VENT OR FLARE  <input type="checkbox"/> SI TA STATUS EXTENSION  <input type="checkbox"/> OTHER         </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR  <input type="checkbox"/> CHANGE WELL NAME  <input type="checkbox"/> CONVERT WELL TYPE  <input type="checkbox"/> NEW CONSTRUCTION  <input type="checkbox"/> PLUG BACK  <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION  <input type="checkbox"/> TEMPORARY ABANDON  <input type="checkbox"/> WATER DISPOSAL  <input checked="" type="checkbox"/> <b>APD EXTENSION</b>          OTHER: <input style="width: 100px;" type="text"/> </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> <b>APD EXTENSION</b> OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> <b>APD EXTENSION</b> OTHER: <input style="width: 100px;" type="text"/>			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Newfield proposes to extend the Application for Permit to Drill this well for on year.					
<b>Approved by the Utah Division of Oil, Gas and Mining</b>  <b>Date:</b> June 05, 2013 <b>By:</b>					
<b>NAME (PLEASE PRINT)</b> Mandie Crozier		<b>PHONE NUMBER</b> 435 646-4825			
<b>SIGNATURE</b> N/A		<b>TITLE</b> Regulatory Tech  <b>DATE</b> 6/4/2013			



**The Utah Division of Oil, Gas, and Mining**

- State of Utah
- Department of Natural Resources

**Electronic Permitting System - Sundry Notices**

**Request for Permit Extension Validation Well Number 43013508000000**

**API:** 43013508000000

**Well Name:** GMBU A-4-9-17

**Location:** 0459 FSL 0404 FWL QTR SWSW SEC 34 TWNP 080S RNG 170E MER S

**Company Permit Issued to:** NEWFIELD PRODUCTION COMPANY

**Date Original Permit Issued:** 6/7/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Signature:** Mandie Crozier

**Date:** 6/4/2013

**Title:** Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-79017
<b>1. TYPE OF WELL</b> Oil Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
<b>2. NAME OF OPERATOR:</b> NEWFIELD PRODUCTION COMPANY		<b>7. UNIT or CA AGREEMENT NAME:</b> GMBU (GRRV)
<b>3. ADDRESS OF OPERATOR:</b> Rt 3 Box 3630 , Myton, UT, 84052		<b>8. WELL NAME and NUMBER:</b> GMBU A-4-9-17
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0459 FSL 0404 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWSW Section: 34 Township: 08.0S Range: 17.0E Meridian: S		<b>9. API NUMBER:</b> 43013508000000
<b>PHONE NUMBER:</b> 435 646-4825 Ext		<b>9. FIELD and POOL or WILDCAT:</b> MONUMENT BUTTE
<b>COUNTY:</b> DUCHESNE		<b>STATE:</b> UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:  <input checked="" type="checkbox"/> SPUD REPORT Date of Spud: 11/30/2013  <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE   <input type="checkbox"/> CHANGE TO PREVIOUS PLANS   <input type="checkbox"/> CHANGE WELL STATUS   <input type="checkbox"/> DEEPEN   <input type="checkbox"/> OPERATOR CHANGE   <input type="checkbox"/> PRODUCTION START OR RESUME   <input type="checkbox"/> REPERFORATE CURRENT FORMATION   <input type="checkbox"/> TUBING REPAIR   <input type="checkbox"/> WATER SHUTOFF   <input type="checkbox"/> WILDCAT WELL DETERMINATION         </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING   <input type="checkbox"/> CHANGE TUBING   <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS   <input type="checkbox"/> FRACTURE TREAT   <input type="checkbox"/> PLUG AND ABANDON   <input type="checkbox"/> RECLAMATION OF WELL SITE   <input type="checkbox"/> SIDETRACK TO REPAIR WELL   <input type="checkbox"/> VENT OR FLARE   <input type="checkbox"/> SI TA STATUS EXTENSION   <input type="checkbox"/> OTHER         </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR   <input type="checkbox"/> CHANGE WELL NAME   <input type="checkbox"/> CONVERT WELL TYPE   <input type="checkbox"/> NEW CONSTRUCTION   <input type="checkbox"/> PLUG BACK   <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION   <input type="checkbox"/> TEMPORARY ABANDON   <input type="checkbox"/> WATER DISPOSAL   <input type="checkbox"/> APD EXTENSION           OTHER: <input style="width: 100%;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. On 11/30/2013 Drill and set 6' of 14" conductor. Drill from 6' to 331' KB of 12 1/4" hole. P/U and ran 7 jts of 8 5/8" casing set depth 325'KB. On 12/2/13 Cement with 185sx of G Neat cement, returned 9bbls to surface, bumped plug to 435psi		
<b>NAME (PLEASE PRINT)</b> Cherei Neilson		<b>PHONE NUMBER</b> 435 646-4883
<b>SIGNATURE</b> N/A		<b>TITLE</b> Drilling Technician
<b>DATE</b> 12/3/2013		<div style="text-align: right;"> <b>Accepted by the Utah Division of Oil, Gas and Mining</b>  <b>FOR RECORD ONLY</b>          December 03, 2013       </div>

**NEWFIELD****Casing****Conductor**

Legal Well Name GMBU A-4-9-17				Wellbore Name Original Hole					
API/UWI 43013508000000		Surface Legal Location SWSW 459 FSL 404 FWL Sec 34 T8S R17E		Field Name GMBU CTB7		Well Type Development		Well Configuration Type Slant	
Well RC 500297313		County Duchesne		State/Province Utah		Spud Date 11/30/2013 08:00		Final Rig Release Date	

<b>Wellbore</b>											
Wellbore Name Original Hole				Kick Off Depth (ftKB)							
Section Des		Size (in)		Actual Top Depth (MD) (ftKB)		Actual Bottom Depth (MD) (ftKB)		Start Date		End Date	
Conductor		14		10		16		11/30/2013		11/30/2013	

<b>Wellhead</b>				
Type	Install Date	Service	Comment	

<b>Wellhead Components</b>									
Des		Make		Model		SN		WP Top (psi)	

<b>Casing</b>							
Casing Description Conductor		Set Depth (ftKB) 16		Run Date 11/30/2013		Set Tension (kips)	
Centralizers				Scratchers			

<b>Casing Components</b>												
Item Des	OD (in)	ID (in)	Wt (lb/ft)	Grade	Top Thread	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)	Mk-up Tq (ft•lb)	Class	Max OD (in)
Conductor	14	13.500	36.75	H-40		1	6.00	10.0	16.0			

<b>Jewelry Details</b>										
<b>External Casing Packer</b>										
Type	Setting Requirement			Release Requirements			Inflation Method		Vol Inflation (gal)	Equiv Hole Sz (in)
Inflation Fluid Type	Infl Fl Dens (lb/gal)	P AV Set (psi)	AV Acting Pressure (psi)	P ICV Set (psi)	P ICV Act (psi)	ECP Load (1000lbf)		Seal Load (1000lbf)		

<b>Slotted Liner</b>							
% Open Area (%)	Perforation Min Dimension (in)	Perforation Max Dimension (in)	Axial Perf Spacing (ft)	Perf Rows	Blank Top Length (ft)	Blank Bottom Length (ft)	
Slot Description	Slot Pattern			Slot Length (in)	Slot Width (in)	Slot Frequency	Screen Gauge (ga)

<b>Liner Hanger</b>					
Retrievable?	Elastomer Type	Element Center Depth (ft)		Polish Bore Size (in)	Polish Bore Length (ft)
Slip Description				Set Mechanics	

Setting Procedure					
Unsetting Procedure					



**NEWFIELD****Casing****Surface**

Legal Well Name GMBU A-4-9-17		Wellbore Name Original Hole	
API/UWI 43013508000000	Surface Legal Location SWSW 459 FSL 404 FWL Sec 34 T8S R17E	Field Name GMBU CTB7	Well Type Development
Well RC 500297313	County Duchesne	State/Province Utah	Spud Date 11/30/2013 08:00
		Well Configuration Type Slant	
		Final Rig Release Date	

<b>Wellbore</b>					
Wellbore Name Original Hole				Kick Off Depth (ftKB)	
Section Des	Size (in)	Actual Top Depth (MD) (ftKB)	Actual Bottom Depth (MD) (ftKB)	Start Date	End Date
Conductor	14	10	16	11/30/2013	11/30/2013
Vertical	12 1/4	16	331	11/30/2013	11/30/2013

<b>Wellhead</b>			
Type	Install Date	Service	Comment

<b>Wellhead Components</b>				
Des	Make	Model	SN	WP Top (psi)

<b>Casing</b>			
Casing Description Surface	Set Depth (ftKB) 325	Run Date 11/30/2013	Set Tension (kips)
Centralizers 3	Scratchers		

<b>Casing Components</b>												
Item Des	OD (in)	ID (in)	Wt (lb/ft)	Grade	Top Thread	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)	Mk-up Tq (ft•lb)	Class	Max OD (in)
Wellhead	8 5/8	8.097	24.00	J-55	STC	1	1.55	10.0	11.6			
Cut off	8 5/8	8.097	24.00	J-55	STC	1	42.82	11.6	54.4			
Casing Joints	8 5/8	8.097	24.00	J-55	STC	5	223.77	54.4	278.1			
Float Collar	8 5/8	8.097	24.00	J-55	STC	1	1.00	278.1	279.1			
Casing Joints	8 5/8	8.097	24.00	J-55	STC	1	44.36	279.1	323.5			
Guide Shoe	8 5/8	8.097	24.00	J-55	STC	1	1.50	323.5	325.0			

<b>Jewelry Details</b>									
<b>External Casing Packer</b>									
Type	Setting Requirement	Release Requirements			Inflation Method	Vol Inflation (gal)	Equiv Hole Sz (in)		
Inflation Fluid Type	Infl FI Dens (lb/gal)	P AV Set (psi)	AV Acting Pressure (psi)	P ICV Set (psi)	P ICV Act (psi)	ECP Load (1000lbf)	Seal Load (1000lbf)		

<b>Slotted Liner</b>							
% Open Area (%)	Perforation Min Dimension (in)	Perforation Max Dimension (in)	Axial Perf Spacing (ft)	Perf Rows	Blank Top Length (ft)	Blank Bottom Length (ft)	
Slot Description	Slot Pattern			Slot Length (in)	Slot Width (in)	Slot Frequency	Screen Gauge (ga)

<b>Liner Hanger</b>			
Retrievable?	Elastomer Type	Element Center Depth (ft)	Polish Bore Size (in)
Slip Description		Set Mechanics	

Setting Procedure
Unsetting Procedure

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross #29  
Submitted By Branden Arnold Phone Number 435-401-0223  
Well Name/Number GMBU A-4-9-17  
Qtr/Qtr SW/SW Section 34 Township 8S Range 17E  
Lease Serial Number UTU-79017  
API Number 43-013-50800

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 11/27/13 7:00 AM ☐ PM ☐

Casing – Please report time casing run starts, not cementing times.

- ☐ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 11/27/13 3:00 AM ☐ PM ☐

BOPE

- ☐ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

RECEIVED

NOV 25 2013

DIV. OF OIL, GAS & MINING

Date/Time \_\_\_\_\_ AM ☐ PM ☐

Remarks \_\_\_\_\_

---

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# NDSI SS # 2  
Submitted By Jim Smith Phone Number 435-823-2072  
Well Name/Number GMBU A-4-9-17  
Qtr/Qtr SW/SW Section 4 Township 8S Range 17E  
Lease Serial Number UTU 79017  
API Number 43-013-50800

Rig Move Notice – Move drilling rig to new location.

Date/Time 12/13/13 10:00 AM ☐ PM ☐

BOPE

- ☒ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time 12/13/13 3:00 AM ☐ PM ☐

Remarks \_\_\_\_\_

---

RECEIVED

DEC 12 2013

DIV. OF OIL, GAS & MINING

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# NDSI SS # 2  
Submitted By Mike Braithwaite Phone Number 401-8392  
Well Name/Number GMBU A-4-9-17  
Qtr/Qtr ~~NE/NE~~ Section 34 Township 8S Range 17E *SW SW*  
Lease Serial Number UTU-79017  
API Number ~~43-047-50800~~ *43-013-50800*

TD Notice – TD is the final drilling depth of hole.

Date/Time 12/16/13 8:00 AM ☐ PM ☐

Casing – Please report time casing run starts, not cementing times.

- ☐ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 12/16/2013 8:00 AM ☐ PM ☐

RECEIVED

DEC 18 2013

DIV. OF OIL, GAS & MINING

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-79017
<b>1. TYPE OF WELL</b> Oil Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
<b>2. NAME OF OPERATOR:</b> NEWFIELD PRODUCTION COMPANY		<b>7. UNIT or CA AGREEMENT NAME:</b> GMBU (GRRV)
<b>3. ADDRESS OF OPERATOR:</b> Rt 3 Box 3630 , Myton, UT, 84052		<b>8. WELL NAME and NUMBER:</b> GMBU A-4-9-17
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0459 FSL 0404 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWSW Section: 34 Township: 08.0S Range: 17.0E Meridian: S		<b>9. API NUMBER:</b> 43013508000000
<b>PHONE NUMBER:</b> 435 646-4825 Ext		<b>9. FIELD and POOL or WILDCAT:</b> MONUMENT BUTTE
<b>COUNTY:</b> DUCHESNE		<b>STATE:</b> UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:  <input type="checkbox"/> SPUD REPORT Date of Spud:  <input checked="" type="checkbox"/> DRILLING REPORT Report Date: 1/16/2014	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE   <input type="checkbox"/> CHANGE TO PREVIOUS PLANS   <input type="checkbox"/> CHANGE WELL STATUS   <input type="checkbox"/> DEEPEN   <input type="checkbox"/> OPERATOR CHANGE   <input checked="" type="checkbox"/> PRODUCTION START OR RESUME   <input type="checkbox"/> REPERFORATE CURRENT FORMATION   <input type="checkbox"/> TUBING REPAIR   <input type="checkbox"/> WATER SHUTOFF   <input type="checkbox"/> WILDCAT WELL DETERMINATION         </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING   <input type="checkbox"/> CHANGE TUBING   <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS   <input type="checkbox"/> FRACTURE TREAT   <input type="checkbox"/> PLUG AND ABANDON   <input type="checkbox"/> RECLAMATION OF WELL SITE   <input type="checkbox"/> SIDETRACK TO REPAIR WELL   <input type="checkbox"/> VENT OR FLARE   <input type="checkbox"/> SI TA STATUS EXTENSION   <input type="checkbox"/> OTHER         </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR   <input type="checkbox"/> CHANGE WELL NAME   <input type="checkbox"/> CONVERT WELL TYPE   <input type="checkbox"/> NEW CONSTRUCTION   <input type="checkbox"/> PLUG BACK   <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION   <input type="checkbox"/> TEMPORARY ABANDON   <input type="checkbox"/> WATER DISPOSAL   <input type="checkbox"/> APD EXTENSION           OTHER: <input style="width: 100%;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. <div style="display: flex; justify-content: space-between;"> <div style="width: 60%;">           The above well was placed on production on 01/16/2014 at 13:30 hours.         </div> <div style="width: 35%; text-align: right;"> <b>Accepted by the              Utah Division of              Oil, Gas and Mining              FOR RECORD ONLY              January 21, 2014</b> </div> </div>		
<b>NAME (PLEASE PRINT)</b> Jennifer Peatross	<b>PHONE NUMBER</b> 435 646-4885	<b>TITLE</b> Production Technician
<b>SIGNATURE</b> N/A	<b>DATE</b> 1/21/2014	